
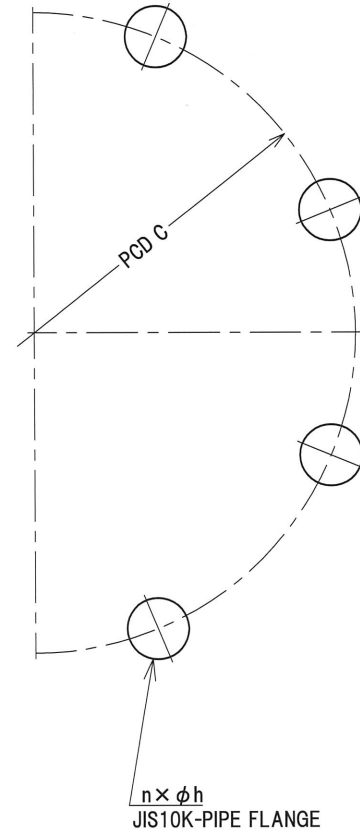


PRESSURE-TEMPERATURE SPECIFIC

STATE OF FLUID	MAXIMUM PERMISSIBLE WORKING PRESSURE
OIL OR PULSATING FLOW 80°C OR BELOW	1.0MPa
STEADY FLOW 80°C OR BELOW	1.4MPa

SIZE		d	L	D	C	n	h	t	Do	H
inch	mm									
6B	150A	150	250	280	240	8	23	22	25	174
8B	200A	200	310	330	290	12	23	24	25	211

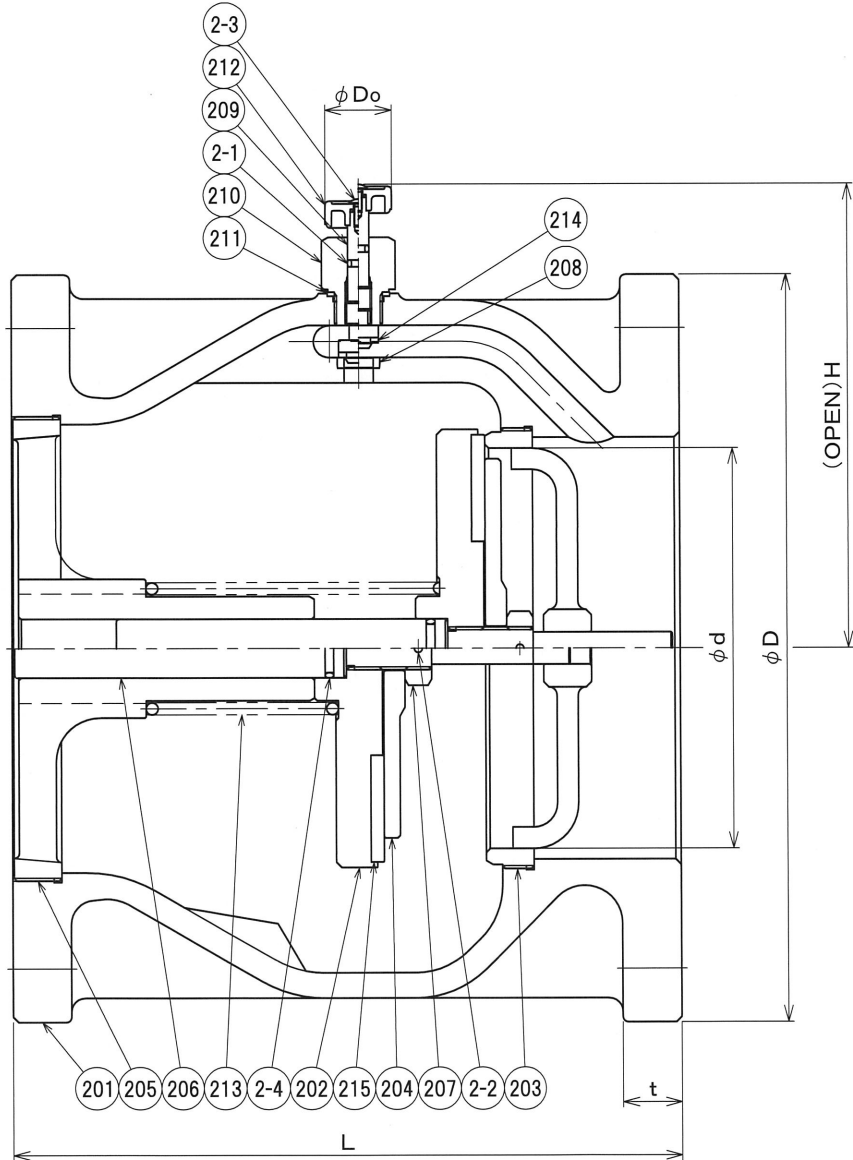

No.	Name of Parts	Materials	Q'ty	Descriptions
2-4	O-RING	NBR	1	
2-3	TRAS SCREWS	SUS304	1	
2-2	SPLITE PIN	SUS304	1	
2-1	O-RING	NBR	1	
215	RUBBER SEAT	NBR	1	
214	DISC	PTFE	1	
213	SPRING	SUS304WPB	1	
212	HANDWHEEL	POM	1	
211	GASKET	NON-ASBESTOS	1	
210	BONNET	C3604BD	1	
209	STEM	C3604BD	1	
208	VALVE SEAT	C3604BD	1	
207	NUT	C3604BD	1	
206	FOLLOWER	C3604BD	1	
205	DISC GUIDE	CAC406	1	
204	PLATE	CAC406	1	
203	BODY SEATRING	CAC406	1	
202	DISC	FC200	1	
201	BODY	FC200	1	

TEST PRESSURE				
BODY (Water)	2.1 MPa			
SEAT (Water)	1.54 MPa			
<WATER HAMMER ABSORPTION TYPE>				FIGURE
CAST IRON 10K FLANGED HAMMERLESS CHECK VALVE				F10HC
Approval	Check	Drawing	Date	Scale
<i>N. Nishikawa</i>	<i>S. Takahara</i>	T.Nishikawa	2021.04.15	
Yamato Valve Co., Ltd.				Drawing No. FBCDB-R004L