
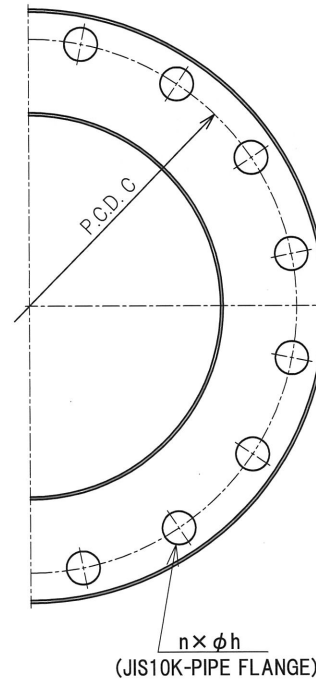


SIZE		d	L	FLANGE					H
inch	mm			D	C	n	h	t	
12 B	300 A	286	540	445	400	16	25	28	363
14 B	350 A	322	690	490	445	16	25	28	391

PRESSURE-TEMPERATURE SPECIFIC

STATE OF FLUID	MAXIMUM PERMISSIBLE WORKING PRESSURE
OIL OR PULSATING FLOW 80°C OR BELOW	1.0MPa
STEADY FLOW 80°C OR BELOW	1.4MPa

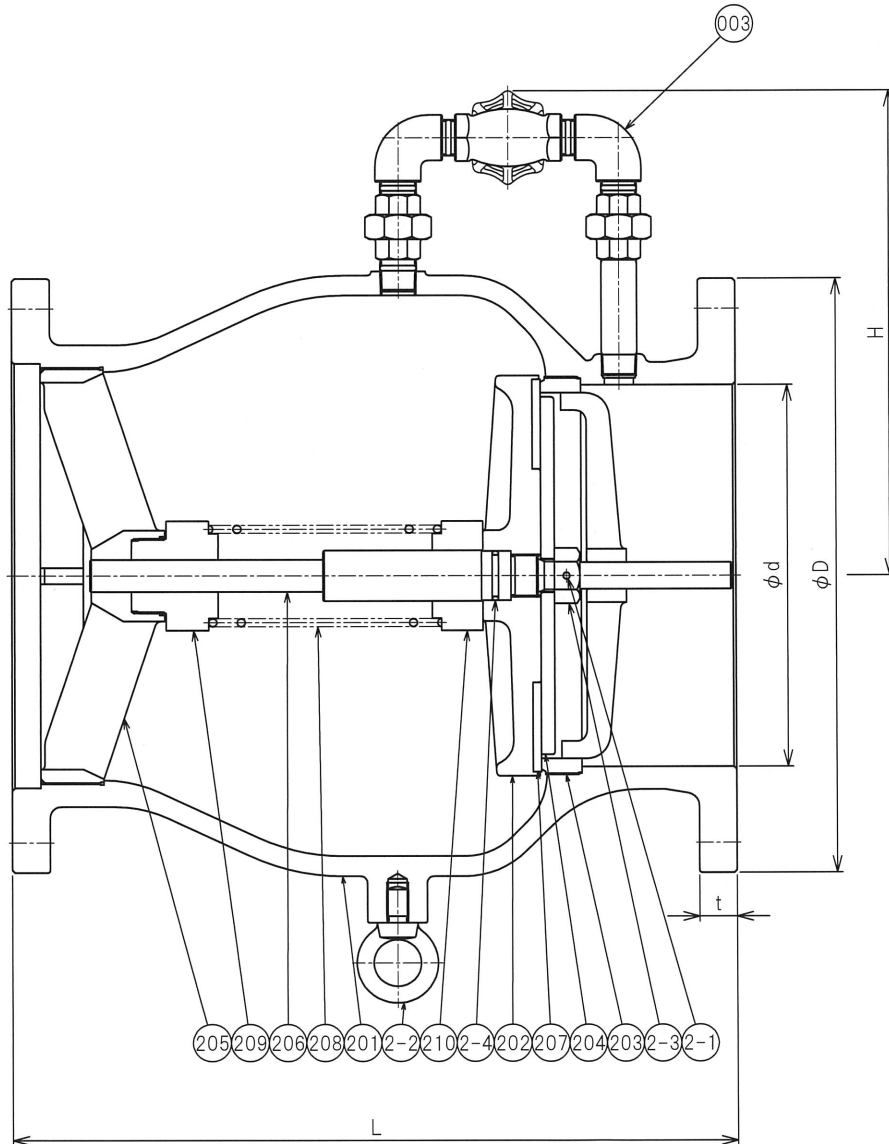

No.	Name of Parts	Materials	Q'ty	Descriptions
003	BYPASS		1set	
2-4	O-RING	NBR	1	
2-3	NUT	SS400	1	
2-2	EYEBOLT	SS400	1	
2-1	SPLIT PIN	SUS304	1	
210	SPRING(B)	CAC406C	1	
209	SPRING(A)	CAC406C	1	
208	SPRING	SUS304WPB	1	
207	RUBBER SEAT	NBR	1	
206	FOLLOWEER	C3604BD	1	
205	DISC GUIDE	CAC406	1	
204	PLATE	FC200	1	
203	BODY SEATRING	CAC406	1	
202	DISC	FC200	1	
201	BODY	FC200	1	

TEST PRESSURE	
BODY (Water)	2.1 MPa
SEAT (Water)	1.54 MPa

<WATER HAMMER ABSORPTION TYPE> FIGURE  
 CAST IRON 10K FLANGED F10HC  
 HAMMERLESS CHECK VALVES

Approval	Check	Drawing	Date	Scale
<i>H. Nishikawa</i>	<i>S. Tehara</i>	T.Nishikawa	2021.04.15	