

Marking(SIZE 40)


<LINING SPECIFICATION>

- PAINT : NYLON 12
- SCOPE : INSIDE & OUTSIDE OF FC PARTS
- COLOR : GRAY
- THICKNESS : 300 μm OR ABOVE (INSIDE)

SIZE		d	L	FLANGE(JIS 10K)					H	WEIGHT (kg)
A	B			D	C	n	h	t		
40	1½	38	115	140	105	4	19	18	113	5.1
50	2	50	130	155	120	4	19	18	123	6.6

<PRESSURE-TEMPERATURE SPECIFICATION>

STATE OF FLUID	MAXIMUM PERMISSIBLE WORKING PRESSURE
OIL OR PULSATING FLOW 60°C OR BELOW	1.0MPa
STEADY FLOW 60°C OR BELOW	1.4MPa

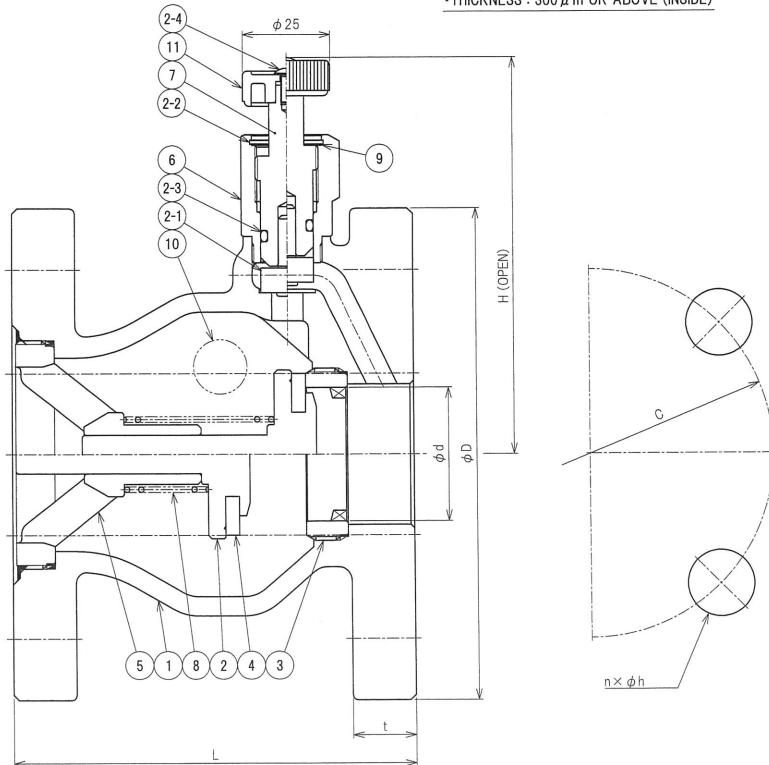

2-4	TRAS SCREWS	SUS304	1	
2-3	O-RING	NBR	1	
2-2	O-TYPE RETAINING RING	SUS304	1	
2-1	TOP&TOP PACKING	BRASS+EPDM	1set	
11	HANDWHEEL	POM	1	
10	LABEL	PEs	1	
9	COVER PLATE	A1050P	1	
8	SPRING	SUS304WPB	1	
7	STEM	C3604BD	1	
6	BONNET	C3604BD	1	
5	DISC GUIDE	CAC406	1	
4	RUBBER SEAT	NBR	1	
3	BODY SEATRING	CAC406	1	
2	DISC	C3604BD	1	
1	BODY	FC200	1	

No.	Name of Parts	Materials	Q'ty	Descriptions
-----	---------------	-----------	------	--------------

PRESSURE INSPECTION

	DELIVERY INSPECTION (INSPECTION)	FORM INSPECTION (TEST)
--	----------------------------------	------------------------

BODY	0.6 [MPa] (Air)	2.1 [MPa] (Water)
------	-----------------	-------------------

SEAT	0.6 [MPa] (Air)	1.54 [MPa] (Water)
------	-----------------	--------------------

<WATER HAMMER ABSORPTION TYPE>			FIGURE	
NYLON-LINING LEAD-CUT CAST IRON			NF 10HCN	
10K FLANGED HAMMERLESS CHECK VALVES				

Approval	Check	Drawing	Date	Scale
<i>[Signature]</i>	<i>[Signature]</i>	T.Nishikawa	2022.04.26	