


Marking(SIZE 150)

SIZE		FLANGE(JIS 10K)								WEIGHT
A	B	d	L	D	C	n	h	t	H	(kg)
150	6	150	250	280	240	8	23	22	180	31.3
200	8	200	310	330	290	12	23	24	217	62.1


<PRESSURE-TEMPERATURE SPECIFICATION>

STATE OF FLUID	MAXIMUM PREMISSIBLE WORKING PRESSURE
OIL OR PULSATING FLOW 60°C OR BELOW	1.0MPa
STEADY FLOW 60°C OR BELOW	1.4MPa

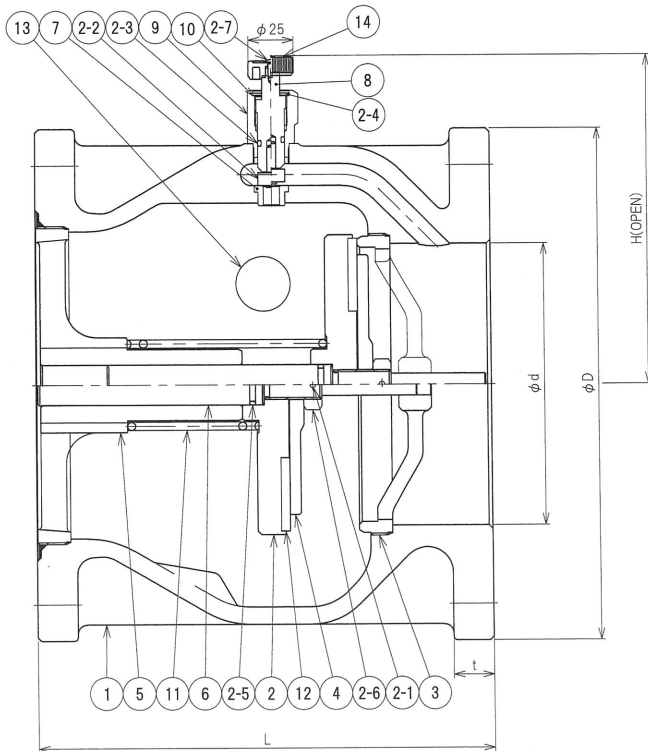

<LINING SPECIFICATION>

- PAINT : NYLON 12
- SCOPE : INSIDE & OUTSIDE OF FC PARTS
- COLOR : GRAY
- THICKNESS : 300μm OR ABOVE (INSIDE)

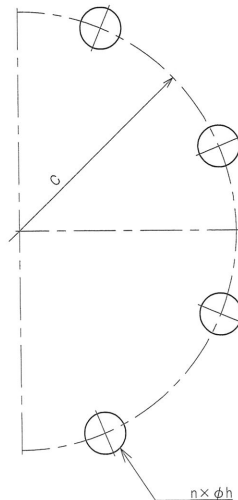

2-7	TRAS SCREWS	SUS304	1	
2-6	NUT	C3604BD	1	
2-5	O-RING	NBR	1	
2-4	C-TYPE RETAINING RING	SUS304	1	
2-3	O-RING	NBR	1	
2-2	TOP&TOP PACKING	BRASS+EPDM	1set	
2-1	SPLIT PIN	SUS304	1	
14	HAND WHEEL	POM	1	
13	LABEL	PEs	1	
12	RUBBER SEAT	NBR	1	
11	SPRING	SUS304-WPB	1	
10	COVER PLATE	A1050P	1	
9	BONNET	C3604BD	1	
8	STEM	C3604BD	1	
7	VALVE SEAT	C3604BD	1	
6	FOLLOWER	C3604BD	1	
5	DISC GUIDE	CAC406	1	
4	PLATE	CAC406	1	
3	BODY SEATRING	CAC406	1	
2	DISC	CAC406	1	
1	BODY	FC200	1	
No.	Name of Parts	Materials	Q'ty	Descriptions

PRESSURE INSPECTION

	DELIVERY INSPECTION (INSPECTION)	FORM INSPECTION (TEST)
BODY	2.1 [MPa] (Water)	2.1 [MPa] (Water)
SEAT	0.6 [MPa] (Air)	1.54 [MPa] (Water)

	FIGURE
<WATER HAMMER ABSORPTION TYPE> NYLON-LINING LEAD-CUT CAST IRON 10K FLANGED HAMMERLESS CHECK VALVES	NF10HCN

Approval	Check	Drawing	Date	Scale
<i>[Signature]</i>	<i>[Signature]</i>	T.Nishikawa	2022.04.12	