



Marking(3/4B)

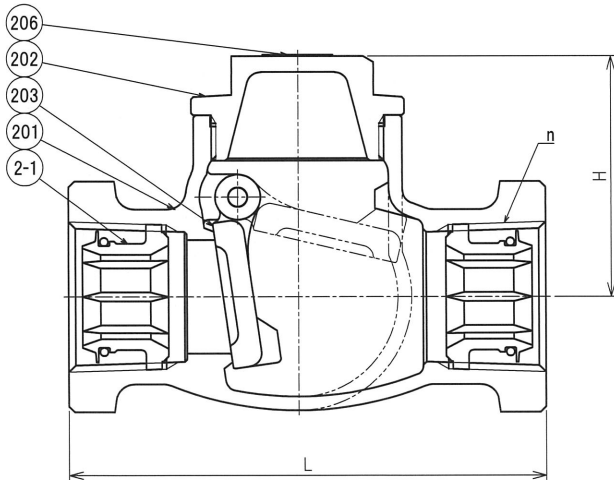

SIZE		L	n	H	B	WEIGHT (kg)
inch	mm					
1/2B	15A	79	Rc 1/2	39	29	0.4
3/4B	20A	90	Rc 3/4	46.5	35	0.6
1B	25A	105	Rc 1	53	44	0.9
1 1/4B	32A	119	Rc 1 1/4	63	54	1.4
1 1/2B	40A	131	Rc 1 1/2	72.5	60	2.0
2B	50A	153	Rc 2	86	74	3.2

<TEMPERATURE-PRESSURE SPECIFIC>

STATE OF FLUID	MAXIMUM PERMISSIBLE WORKING PRESSURE
STEADY FLOW - 40°C OR BELOW	1.0 MPa
PULSATING FLOW - 40°C OR BELOW	1.0 MPa

2-1	C-CORE	EPDM	2	O-Ring
		PE		
206	LABEL	PE	1	Color:Blue
205	PLUG	C3604BD	1	
204	HINGE PIN	C3604	1	
203	DISC	CAC406	1	
202	BONNET	CAC406	1	
201	BODY	CAC406	1	
No.	Name of Parts	Materials	Q'ty	Descriptions

TEST PRESSURE	
BODY (Water)	2.1 MPa
SEAT (Water)	1.54 → 0.51 MPa

JV-5 CORERING VALVE <FOR COLD WATER> LEAD-CUT BRONZE 10K SCREWED SWING CHECK VALVES				FIGURE 10C-CN
---	--	--	--	------------------

Approval	Check	Drawing	Date	Scale
		T.Nishikawa	2022.03.07	

Yamato Valve Co.,Ltd.		図番	Drawing No. BBCFC-R018C
-----------------------	--	----	----------------------------