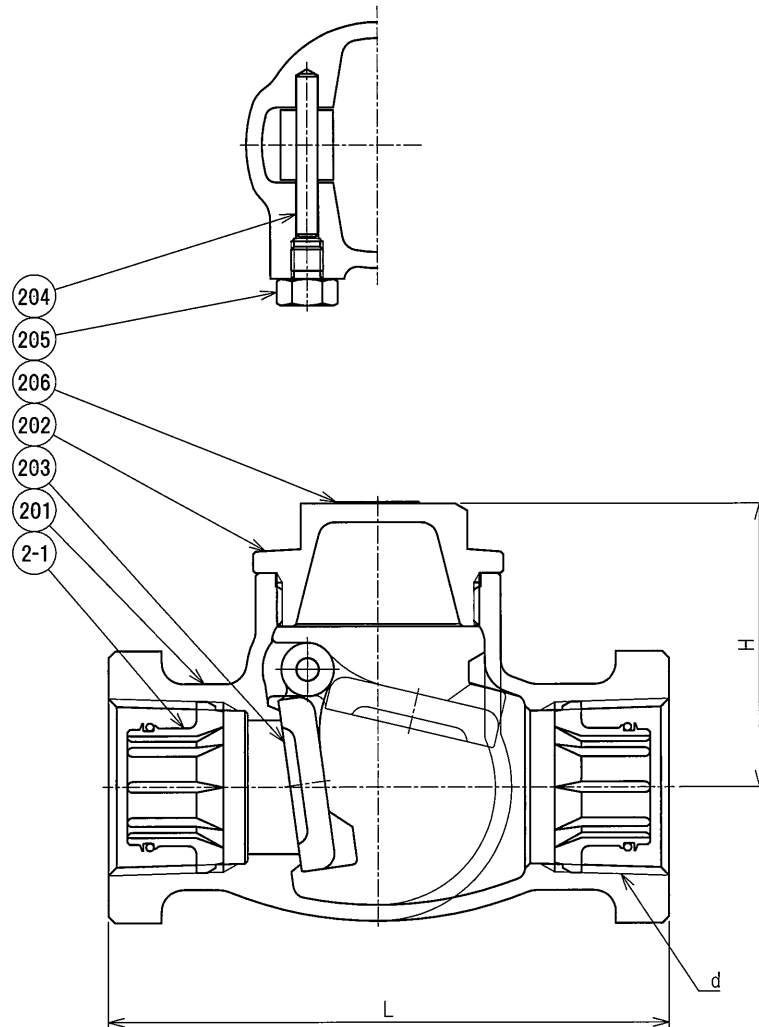


SIZE		n	L	B	H
inch	mm				
1/2B	15A	Rc 1/2	79	29	39
3/4B	20A	Rc 3/4	90	35	46.5
1B	25A	Rc1	105	44	53
1 1/4B	32A	Rc1 1/4	119	54	63
1 1/2B	40A	Rc1 1/2	131	60	72.5
2B	50A	Rc2	153	74	86

PRESSURE-TEMPERATURE SPECIFIC

STATE OF FLUID	MAXIMUM PERMISSIBLE WORKING PRESSURE
STEADY FLOW-85°C OR BELOW	1.0 MPa
PULSATING FLOW-85°C OR BELOW	1.0 MPa

2-1	PB-CORE	EPDM	2	O-RING
		POLYBUTENE		
206	CORE LABEL	POLYESTER	1	BROWN
205	PLUG	C3604BD	1	
204	HINJE PIN	C3604	1	
203	DISC	CAC406	1	
202	BONNET	CAC406	1	
201	BODY	CAC406	1	
No.	Name of Parts	Materials	Q'ty	Descriptions
TEST PRESSURE				
BODY (Water)		2.1 MPa		
SEAT (Water)		1.54 → 0.51 MPa		
JV5 CORERING VALVE (FOR HOT WATER) LEAD-CUT BRONZE 10K SCREWED SWING CHECK VALVES				FIGURE
				10C-HN
Approval	Check	Drawing	Date	Scale
<i>S. Ume</i>	<i>S. Ume</i>	S.Tehara	2020.01.09	
Yamato Valve Co., Ltd.				Drawing No. BBCFC-R019B