



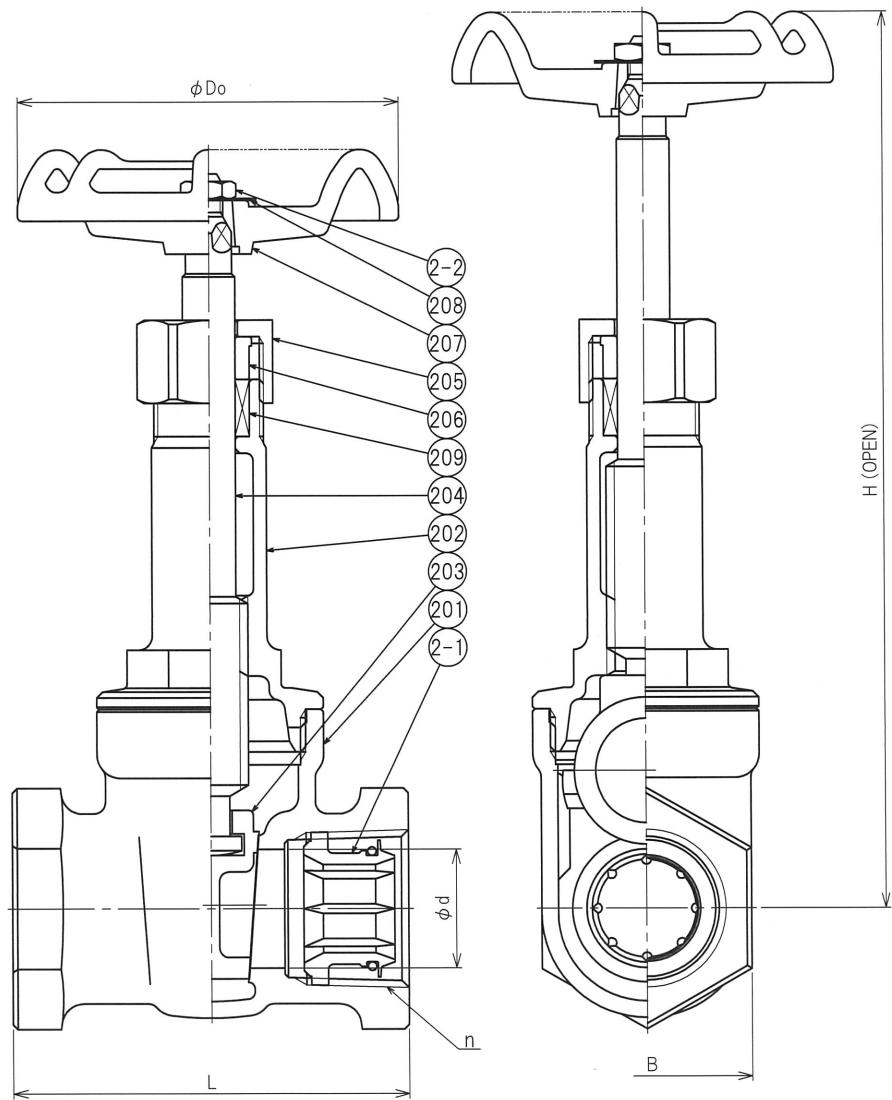

SIZE		d	L	n	D _o	H	B	WEIGHT (kg)
inch	mm							
1/2 B	15A	15	64	Rc 1/2	55	135.5	29	0.5
3/4 B	20A	20	72	Rc 3/4	70	159	35	0.7
1B	25A	25	83	Rc 1	80	189	44	1.1
1 1/4 B	32A	32	84	Rc 1 1/4	90	217	54	1.7
1 1/2 B	40A	40	85	Rc 1 1/2	100	251	60	2.2
2B	50A	50	100	Rc 2	110	303	74	3.5

PRESSUER-TEMPERATURE SPECIFIC

STATE OF FLUID	MAXIMUM PERMISSIBLE WORKING PRESSURE
PULSATING FLOW-40°C OR BELOW	1.0 MPa
STEADY FLOW-40°C OR BELOW	1.0 MPa

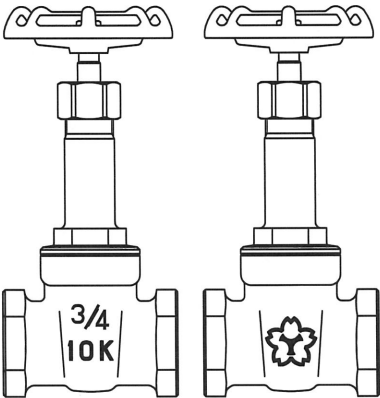

Marking(3/4B)

2-2	NUT	C3604BD	1	
2-1	C-CORE	EPDM PE	2	
209	PACKING	NON-ASBESTOS	1	
208	NAME PLATE	A1050P	1	
207	HANDWHEEL	ADC12	1	Light Blue
206	PACKING GLAND	C3604BD	1	
205	PACKING NUT	C3604BD	1	
204	STEM	NBY	1	Dezincification Resistant Brass Rod
203	DISC	CAC406	1	
202	BONNET	CAC406	1	
201	BODY	CAC406	1	
No.	Name of Parts	Materials	Q'ty	Descriptions

TEST PRESSURE				
BODY (Water)	2.1 MPa			
SEAT (Water)	1.54 MPa			

JV5 CORERING VALVES <FOR COLD WATER> LEAD-CUT BRONZE 10K SCREWED GATE VALVES				FIGURE 10G-CN
--	--	--	--	------------------

Approval	Check	Drawing	Date	Scale
		T.Nishikawa	2022.03.07	

Yamato Valve Co., Ltd.				Drawing No. BBAFG-R005B
------------------------	--	--	--	----------------------------