


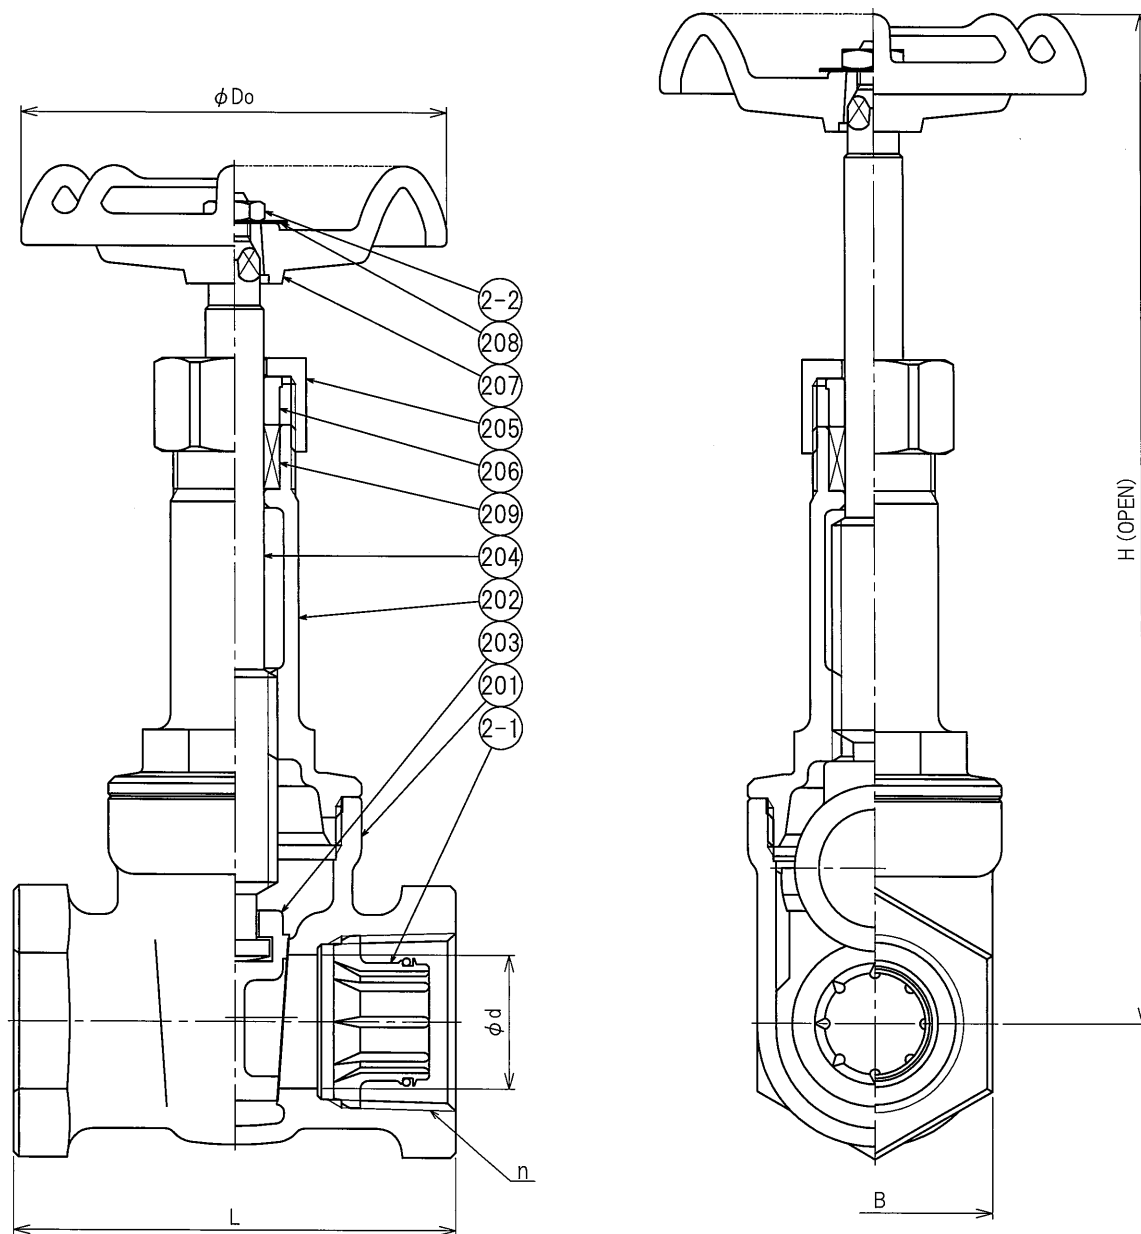

SIZE		d	L	n	D0	H	B
1/2 B	15A	15	64	Rc 1/2	55	135.5	29
3/4 B	20A	20	72	Rc 3/4	70	159	35
1B	25A	25	83	Rc 1	80	189	44
1 1/4 B	32A	32	84	Rc 1 1/4	90	217	54
1 1/2 B	40A	40	85	Rc 1 1/2	100	251	60
2B	50A	50	100	Rc 2	110	303	74

PRESSUER-TEMPERATURE SPECIFIC

STATE OF FLUID	MAXIMUM PERMISSIBLE WORKING PRESSURE
STEADY FLOW-85°C OR BELOW	1.0 MPa
PULSATING FLOW-85°C OR BELOW	1.0 MPa

2-2	NUT	C3604BD	1	
2-1	PB-CORE	EPDM	2	
		POLYBUTENE		
209	PACKING	NON-ASBESTOS	1	
208	NAME PLATE	A1050P	1	
207	HANDWHEEL	ADC12	1	RED
206	PACKING GLAND	C3604BD	1	
205	PACKING NUT	C3604BD	1	
204	STEM	NBY	1	
203	DISC	CAC406	1	
202	BONNET	CAC406	1	
201	BODY	CAC406	1	
No.	Name of Parts	Materials	Q'ty	Descriptions

TEST PRESSURE

BODY (Water)	2.1 MPa
SEAT (Water)	1.54 MPa

JV5 CORERING VALVES <FOR HOT WATER> LEAD-CUT BRONZE 10K SCREWED GATE VALVES	FIGURE 10G-HN
---	------------------

Approval	Check	Drawing	Date	Scale
S.UMG	<i>[Signature]</i>	S.TEHARA	2017.09.27	

Yamato Valve Co., Ltd.	図番	Drawing No. BBAFG-R006A
-------------------------------	----	----------------------------