


Unit:mm

SIZE		d	n	L	I LIFT	H	WEIGHT
A	B						(kg)
15	1/2	15	Rc 1/2	75	7.0	49	0.7
20	3/4	20	Rc 3/4	90	7.5	51	1.0
25	1	25	Rc 1	105	9.0	58	1.4
32	1 1/4	32	Rc 1 1/4	120	11.0	66	2.2
40	1 1/2	40	Rc 1 1/2	135	13.0	75	3.1
50	2	50	Rc 2	160	15.5	86	4.9



Front

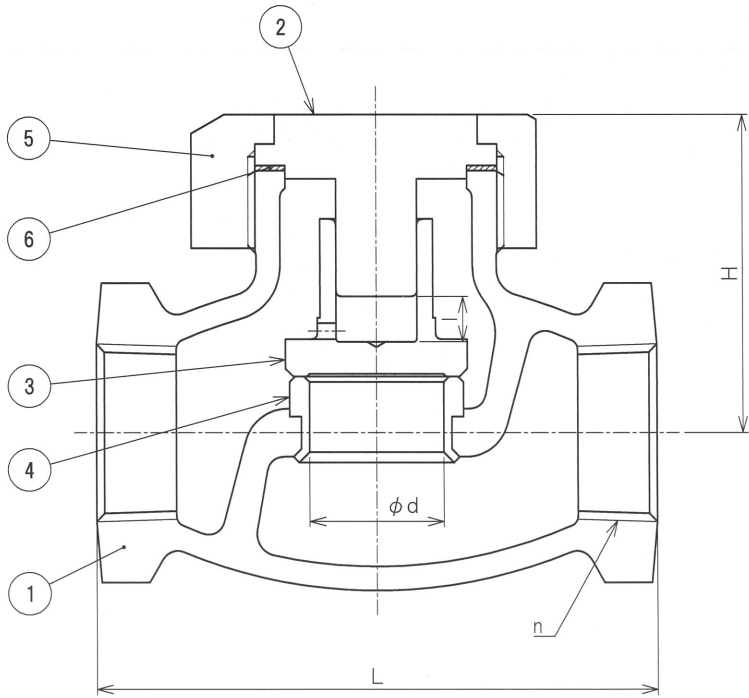

Back

Body Marking (Ex. Size 1)

※ Rating of body marking : "20K"

6	GASKET	NON-ASBESTOS	1	
5	BONNET NUT	FCD-S	1	
4	BODY SEAT RING	SUS403 or SUS410	1	Hard Facing
3	DISC	SUS403 or SUS410	1	Hard Facing
2	BONNET	SCS1	1	
1	BODY	FCD-S	1	
No.	Name of Parts	Materials	Q'ty	Descriptions
TEST PRESSURE				
BODY (Water)		3.30 MPa		
SEAT (Water)		2.42 MPa		
DUCTILE CAST IRON 16K SCREWED LIFT CHECK VALVES				FIGURE D16SLCH
Approval	Check	Drawing	Date	Scale
	S. Ume	A. Setoguchi	2024.02.20	
Yamato Valve Co., Ltd.			図番	Drawing No. D16SLCH-R001B-E