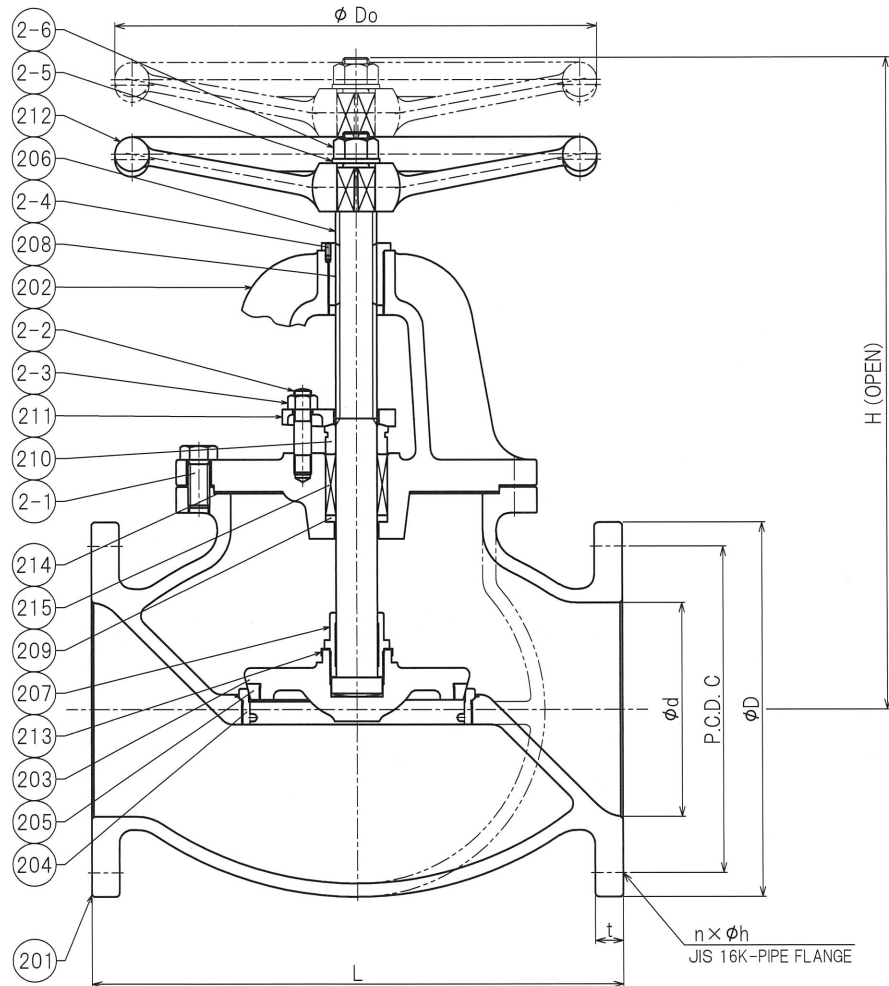


SIZE		d	L	FLANGE					Do	H
inch	mm			D	C	n	h	t		
2B	50A	50	203	155	120	8	19	16	180	285
2 1/2 B	65A	65	216	175	140	8	19	18	180	305
3B	80A	80	241	200	160	8	23	20	224	336
4B	100A	100	292	225	185	8	23	22	280	383
5B	125A	125	356	270	225	8	25	22	300	436
6B	150A	150	406	305	260	12	25	24	355	506
8B	200A	200	495	350	305	12	25	26	450	609

2-6	NUT	SS400	1	UNI-CR PLATING
2-5	WASHER	SS400	1	UNI-CR PLATING
2-4	SET SCREW	SCM435	1	
2-3	NUT	SS400	2	UNI-CR PLATING
2-2	STUD BOLT	SS400	2	UNI-CR PLATING
2-1	BOLT	S45C		
215	PACKING	NON-ASBESTOS	1set	
214	GASKET	NON-ASBESTOS	1	
213	LOCK WASHER	SUS304CP	1	
212	HANDWHEEL	FC200	1	
211	PACKING GLAND	FCD450-10	1	UNI-CR PLATING
210	PACKING BUSH	CAC406C CAC406	1	100A UNDER 125A OVER
209	BONNET BUSH	CAC406C	1	
208	YOKE BUSH	CAC406	1	
207	STEM NUT	FCD500-7	1	
206	STEM	SUS403	1	
205	DISC SEATRING	SUS403	1	80A OVER
204	BODY SEATRING	SUS403	1	
203	DISC	SUS403 FCD450-10	1	65A UNDER 80A OVER
202	BONNET	FCD450-10	1	
201	BODY	FCD450-10	1	
No.	Name of Parts	Materials	Q'ty	Descriptions

TEST PRESSURE

BODY (Water)	3.30 MPa
SEAT (Water)	2.42 MPa

DUCTILE CAST IRON 16K FLANGED GLOBE VALVES

FIGURE

D16S

Approval	Check	Drawing	Date	Scale
<i>[Signature]</i>	<i>[Signature]</i>	S.Uno	2022.3.4	

Yamato Valve Co., Ltd.	図番	Drawing No. DCBCA-R002X
-------------------------------	----	----------------------------