


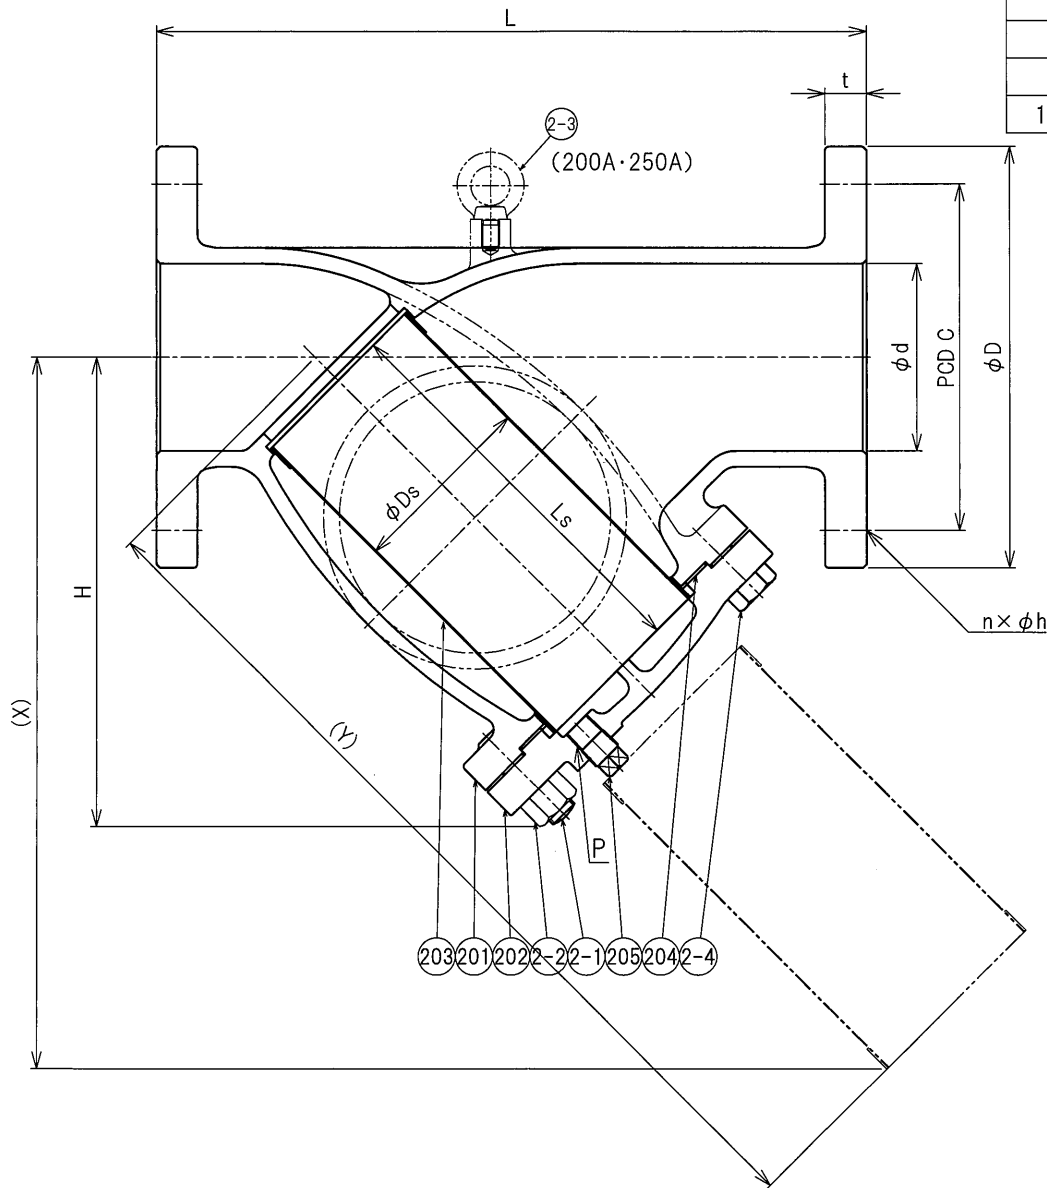

SIZE		d	L	FLANGE					H	X	Y	SCREEN		P
inch	mm			D	C	n	h	t				Ds	Ls	
2B	50A	50	240	155	120	8	19	16	154	230	299	56	126.5	Rc ³ / ₈
2½ B	65A	65	280	175	140	8	19	18	173	258	331	68	142	Rc ³ / ₈
3B	80A	76	320	200	160	8	23	20	206	313	400	84	174	Rc ³ / ₈
4B	100A	100	380	225	185	8	23	22	251	380	485	103	215	Rc ³ / ₈
5B	125A	125	440	270	225	8	25	22	310	476	608	128	268	Rc ³ / ₈
6B	150A	150	520	305	260	12	25	24	361	563	717	152	320	Rc 1½
8B	200A	200	620	350	305	12	25	26	465	740	942	208	430	Rc ¾
10B	250A	250	760	430	380	12	27	28	565	857	1074	275	485	Rc ¾

2-4	BOLT	S45C		
2-3	EYE BOLT	S20C	1	200A,250A
2-2	NUT	S45C	2	
2-1	STUD BOLT	S45C	2	
205	PLUG	C3604BD	1	
204	GASKET	NON-ASBESTOS	1	
203	SCREEN	SUS304CP	1	
202	COVER	FCD450-10	1	
201	BODY	FCD450-10	1	

No.	Name of Parts	Materials	Q'ty	Descriptions
PRESSURE INSPECTION				
DELIVERY INSPECTION (INSPECTION)		FORM INSPECTION (TEST)		
BODY	0.6 [MPa] (Air)	3.3 [MPa] (Water)		
SEAT	-	-		

SCREEN MESH SPEC.

20MESH	
40MESH	
60MESH	
80MESH	

DUCTILE CAST IRON 16K FLANGED Y-TYPE STRAINER				FIGURE D16Y
Approval	Check	Drawing	Date	Scale
<i>S. Ume</i>	<i>S. Ume</i>	S.TEHARA	2019.04.16	
Yamato Valve Co., Ltd.				図番 Drawing No. DCSAA-R026H