



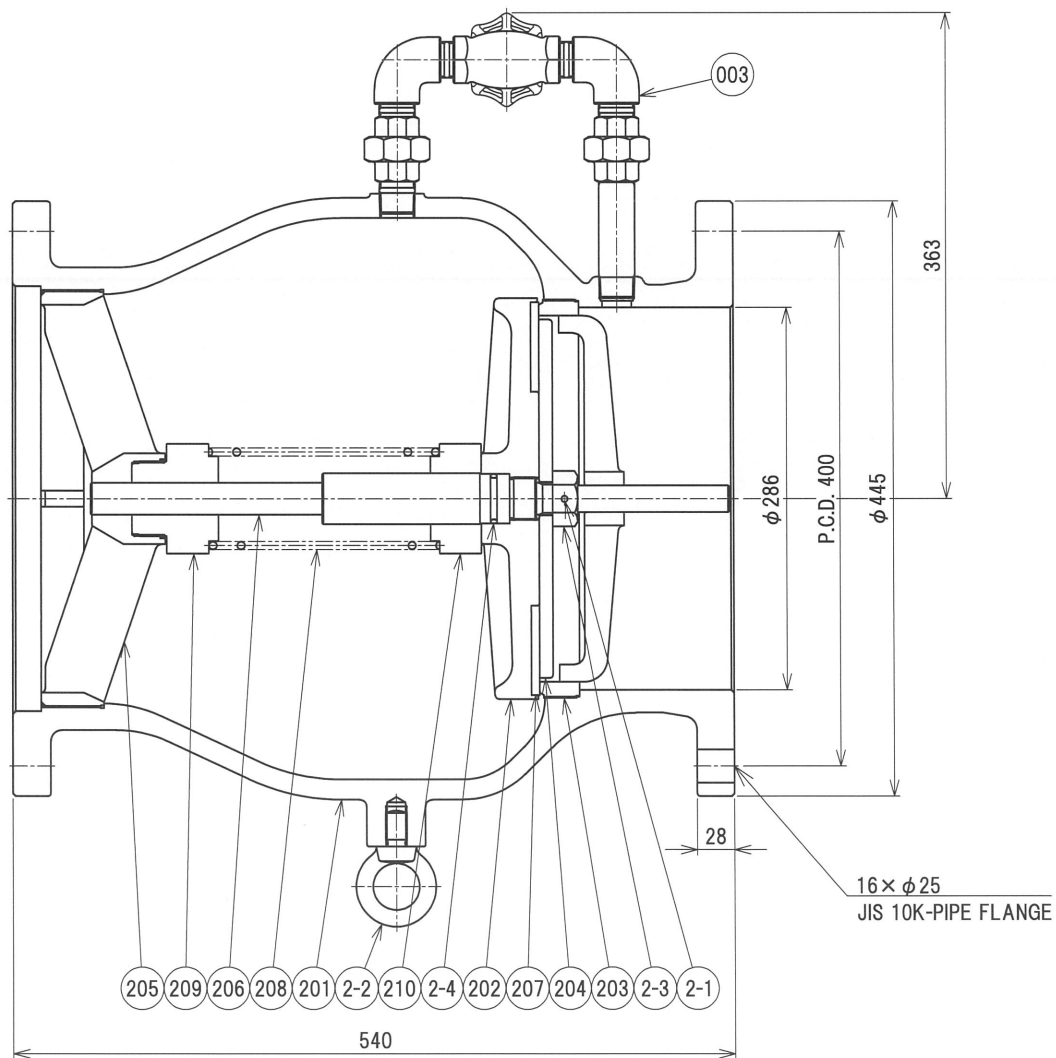

PRESSURE-TEMPERATURE SPECIFIC

STATE OF FLUID	MAXIMUM PERMISSIBLE WORKING PRESSURE
OIL OR PULSATING FLOW 80°C OR BELOW	1.0MPa
STEADY FLOW 80°C OR BELOW	1.4MPa



003	BYPASS		1set	
2-4	O-RING	NBR	1	
2-3	NUT	SS400	1	
2-2	EYEBOLT	SS400	1	
2-1	SPLIT PIN	SUS304	1	
210	SPRING(B)	CAC406C	1	
209	SPRING(A)	CAC406C	1	
208	SPRING	SUS304WPB	1	
207	RUBBER SEAT	NBR	1	
206	FOLLOWEER	C3604B	1	
205	DISC GUIDE	CAC406	1	
204	PLATE	FC200	1	
203	BODY SEATRING	CAC406	1	
202	DISC	FC200	1	
201	BODY	FC200	1	
No.	Name of Parts	Materials	Q'ty	Descriptions
TEST PRESSURE				
BODY (Water)		2.10 [MPa]		
SEAT (Water)		1.54 [MPa]		
<WATER HAMMER ABSORPTION TYPE> CAST IRON 10K FLANGED HAMMERLESS CHECK VALVES 300A				FIGURE
				F10HC
Approval	Check	Drawing	Date	Scale
M. Ozaki	S. Uno	T. KURISU	2025.05.16	
Yamato Valve Co., Ltd.			Drawing No. FBCDF-R003M-E	