
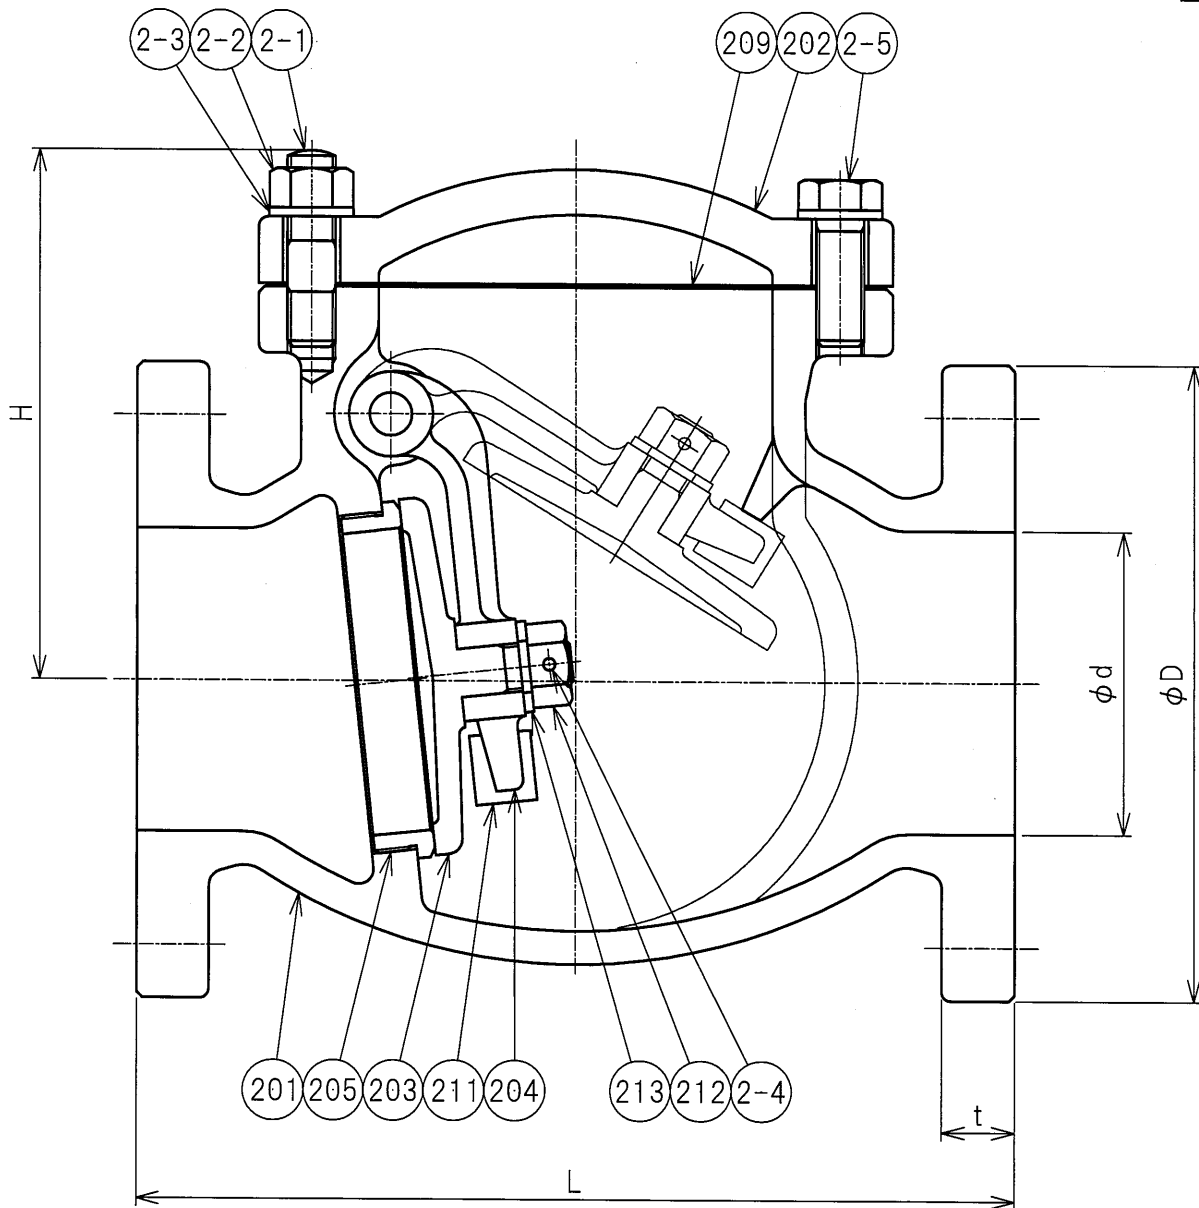


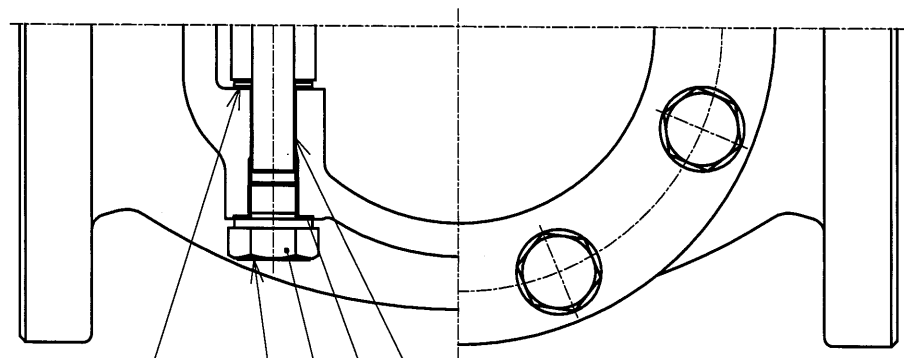


<TEMPERATURE-PRESSURE SPECIFIC>

STATE OF FLUID	MAXIMUM PERMISSIBLE WORKING PRESSURE
OIL OR PULSATING FLOW - 60°C OR BELOW	1.0 MPa
STEADY FLOW - 60°C OR BELOW	1.4 MPa

<LINING SPECIFIC>

- PAINT : NYRON 12
- SCOPE : INSIDE&OUTSIDE OF FC PARTS
- COLOR : GRAY
- THICKNESS : 300μ OR ABOVE (INSIDE)

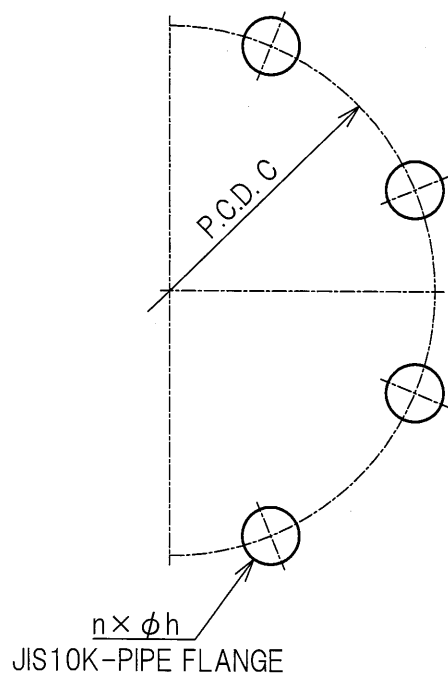

SIZE		d	L	FLANGE					H
inch	mm			D	C	n	h	t	
2B	50A	50	200	155	120	4	19	20	125
2 1/2 B	65A	65	220	175	140	4	19	22	135
3B	80A	80	240	185	150	8	19	22	157
4B	100A	100	290	210	175	8	19	24	175
5B	125A	125	360	250	210	8	23	24	200
6B	150A	150	410	280	240	8	23	26	225

2-5	BOLT	SS400		UNI-CR PLATING
2-4	SPLIT PIN	SUS304	1	
2-3	WASHER	SS400		UNI-CR PLATING
2-2	NUT	SS400	2	UNI-CR PLATING
2-1	STUD BOLT	SS400	2	UNI-CR PLATING
214	NAME PLATE	POLYESTER	1	
213	WASHER	SUS304	1	
212	NUT	SUS304	1	
211	STOPPER	NBR	1	
210	GASKET	T/#1995	1	NON-ASBESTOS
209	GASKET	T/#1995	1	NON-ASBESTOS
208	PLUG	C3604BD	1	
207	SPASER	PTFE	2	
206	HINGE PIN	C3604BD	1	
205	BODY SEATRING	CAC406	1	
204	ARM	CAC406	1	
203	DISC	CAC406	1	
202	BONNET	FC200	1	
201	BODY	FC200	1	
No.	Name of Parts	Materials	Q'ty	Descriptions

TEST PRESSURE				
BODY (Water)	2.1 MPa			
SEAT (Water)	1.54 → 0.51 MPa			
JIS B 2031 LEAD-CUT CAST IRON 10K FLANGED NYLON-LINING SWING CHECK VALVES				FIGURE NF10CNE
Approval	Check	Drawing	Date	Scale
S. Ume	Y. TAKEUCHI	S. TEHARA	2017.02.16	
Yamato Valve Co., Ltd.				Drawing No. FBCAP-R029C