



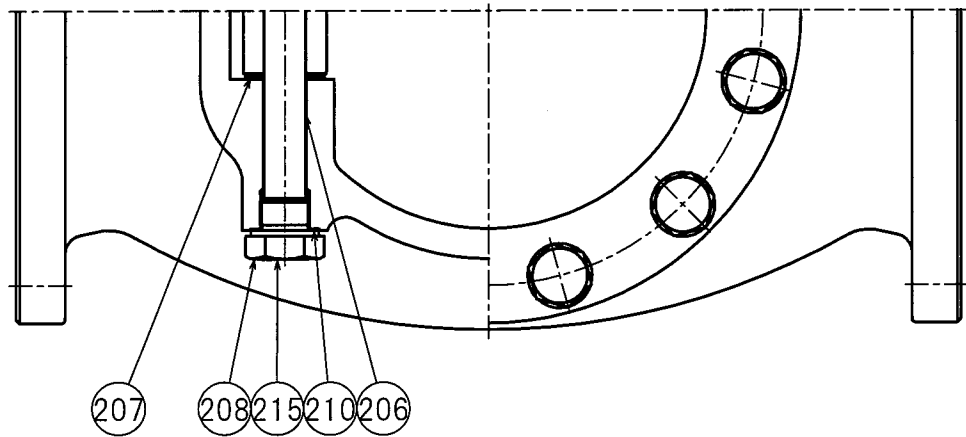


<TEMPERATURE-PRESSURE SPECIFIC>

STATE OF FLUID	MAXIMUM PERMISSIBLE WORKING PRESSURE
OIL OR PULSATING FLOW - 60°C OR BELOW	1.0 MPa
STEADY FLOW - 60°C OR BELOW	1.4 MPa

<LINING SPECIFIC>

- ・PAINT : NYRON 12
- ・SCOPE : INSIDE&OUTSIDE OF FC PARTS
- ・COLOR : GRAY
- ・THICKNESS : 300 μ OR ABOVE (INSIDE)

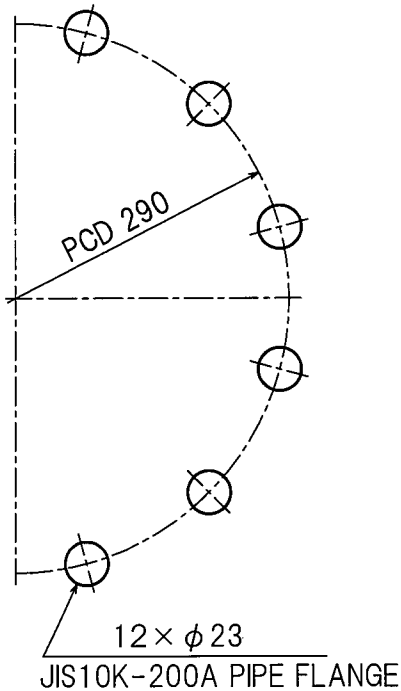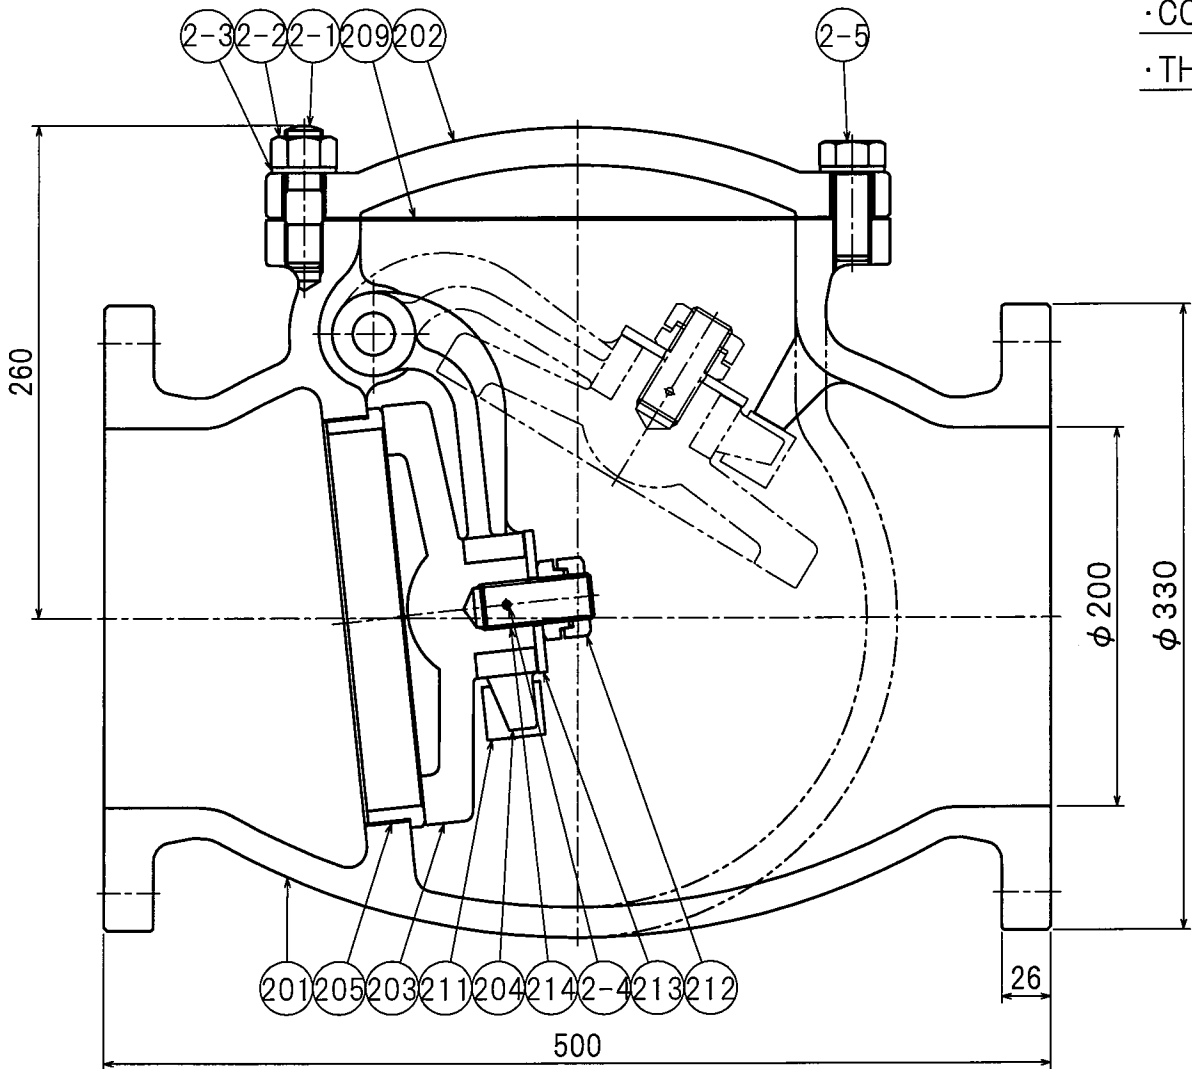

2-5	BOLT	SS400	10	UNI-CR PLATING
2-4	TAPER PIN	SUS304	1	
2-3	WASHER	SS400	12	UNI-CR PLATING
2-2	NUT	SS400	2	UNI-CR PLATING
2-1	STUD BOLT	SS400	2	UNI-CR PLATING
215	NAME PLATE	POLYESTER	1	
214	DISC BOLT	SUS304	1	
213	WASHER	SUS304	1	
212	HARD LOCK NUT	SUS304	1	
211	STOPPER	NBR	1	
210	GASKET	T/#1995	1	NON-ASBESTOS
209	GASKET	T/#1995	1	NON-ASBESTOS
208	PLUG	C3604BD	1	
207	SPASER	PTFE	2	
206	HINGE PIN	C3604BD	1	
205	BODY SEATRING	CAC406	1	
204	ARM	CAC406	1	
203	DISC	CAC406	1	
202	BONNET	FC200	1	
201	BODY	FC200	1	
No.	Name of Parts	Materials	Q'ty	Descriptions

TEST PRESSURE				
BODY (Water)	2.1 MPa			
SEAT (Water)	1.54 → 0.51 MPa			
JIS B 2031 LEAD-CUT CAST IRON 10K FLANGED NYLON-LINING SWING CHECK VALVES 200A				FIGURE NF10CNE
Approval	Check	Drawing	Date	Scale
S-Umo	Y.TAKEUCHI	T.KOZAI	2014.10.24	
Yamato Valve Co., Ltd.				図番 Drawing No. FBCAP-R030B