



SIZE		d	L	FLANGE					(H)
inch	mm			D	C	n	h	t	
10B	250A	250	620	400	355	12	25	30	348

<TEMPERATURE-PRESSURE SPECIFIC>

STATE OF FLUID	MAXIMUM PERMISSIBLE WORKING PRESSURE
OIL OR PULSATING FLOW - 60°C OR BELOW	1.0 MPa
STEADY FLOW - 60°C OR BELOW	1.4 MPa

<LINING SPECIFIC>

- PAINT : NYRON 12
- SCOPE : INSIDE&OUTSIDE OF FC PARTS
- COLOR : GRAY
- THICKNESS : 300 μ OR ABOVE (INSIDE)

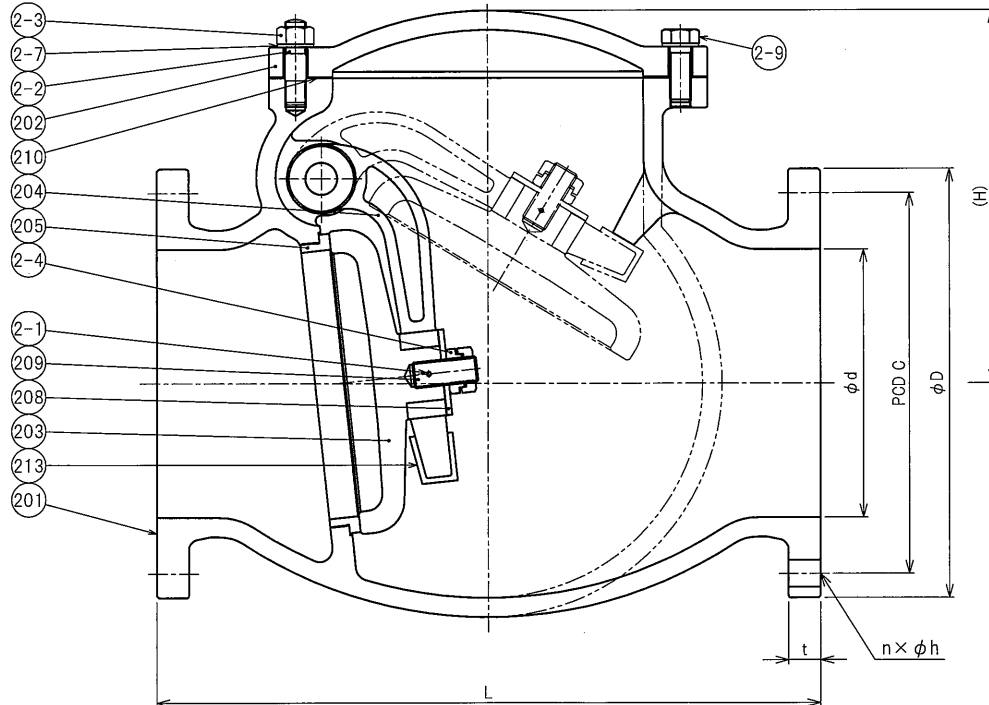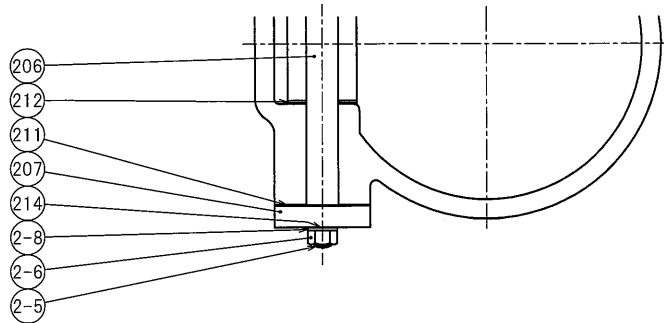

2-9	BOLT	SS400	10	UNI-CR PLATING
2-8	WASHER	SS400	2	UNI-CR PLATING
2-7	WASHER	SS400	12	UNI-CR PLATING
2-6	NUT	SS400	2	UNI-CR PLATING
2-5	STUD BOLT	SS400	2	UNI-CR PLATING
2-4	HARD LOCK NUT	SUS304	1	
2-3	NUT	SS400	2	UNI-CR PLATING
2-2	STUD BOLT	SS400	2	UNI-CR PLATING
2-1	TAPER PIN	SUS304	1	
214	NAME LABEL	POLYESTER	1	
213	STOPPER	NBR	1	
212	SPASER	PTFE	2	
211	GASKET	NON-ASBESTOS	1	
210	GASKET	NON-ASBESTOS	1	
209	STUD BOLT	SUS304	1	
208	WASHER	SUS403	1	
207	SIDE COVER	SS400	1	NYLON-LINING
206	HINGE PIN	SUS403	1	
205	BODY SEATRING	CAC406	1	
204	ARM	CAC406	1	
203	DISC	CAC406	1	
202	BONNET	FC200	1	NYLON-LINING
201	BODY	FC200	1	NYLON-LINING
No.	Name of Parts	Materials	Q'ty	Descriptions

TEST PRESSURE

BODY (Water)	2.1 MPa
SEAT (Water)	1.54 → 0.51 MPa

JIS B 2031 LEAD-CUT CAST IRON 10K FLANGED NYLON-LINING SWING CHECK VALVES	FIGURE NF10CN
---	------------------

Approval	Check	Drawing	Date	Scale
<i>S. Tebara</i>	<i>S. Uno</i>	S.TEHARA	2018.09.27	

Yamato Valve Co., Ltd.	図番	Drawing No. FBCAP-R031D
-------------------------------	----	----------------------------