
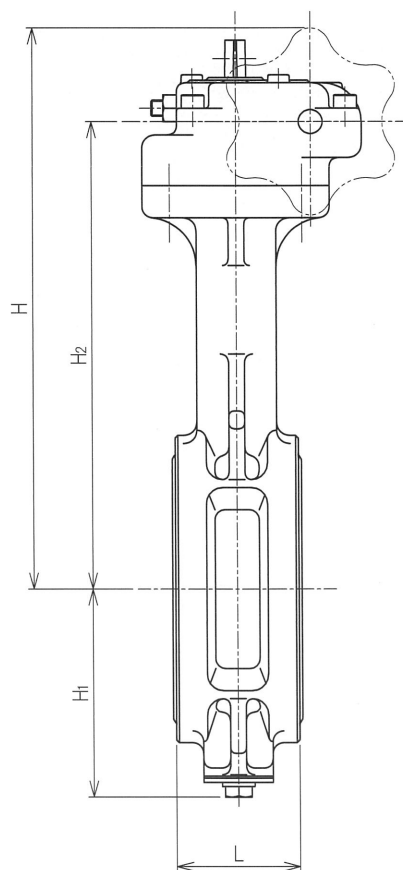
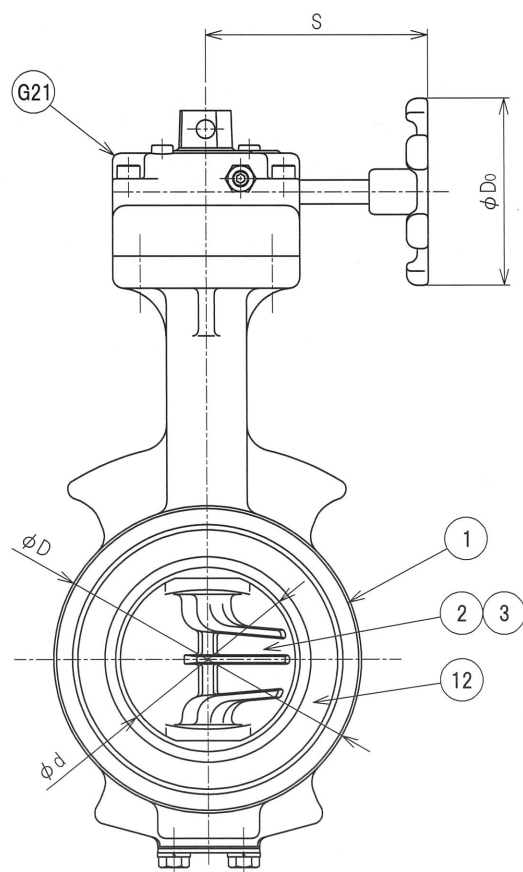
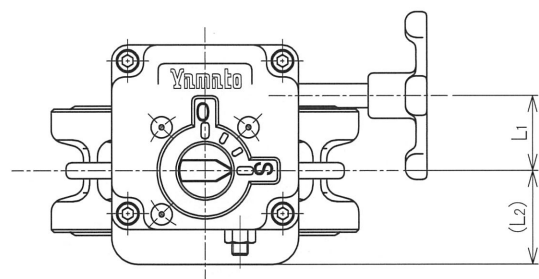


Handle Form
Size 80 over



Handle Form
Size 65 under

Size		d	L	D	H	H ₁	H ₂	L ₁	L ₂	S	D ₀	Unit : mm	
A	B											WEIGHT	(kg)
50	2	56	43	90	197	68	162	28	35	83	70		2.3
65	2½	69	46	115	210	79	175						3.0
80	3	84	46	126	233	86	183	46	48	145	100		3.6
100	4	104	52	146	244	103	194						4.5
125	5	130	56	181	284	118	221	53	51	160	125		7.7
150	6	153.5	56	211	295	135	232						9.6
200	8	199	60	256	363	177	263	71	65	208	200		15.7
250	10	253	68	322	416	215	316						23.7
300	12	302	78	367	451	253	351						31.0

MAXIMUM PERMISSIBLE
WORKING PRESSURE

1.0 MPa

※ Please refer to the Catalogue for consecutive use temperature ranges.

FLANGE RATING

JIS 5K

JIS 10K

TYPE

SEAT RING

NGR-SN

NBR

NGR-SE

EPDM

G21	WORM GEAR ACTUATOR	ADC12	1set	ACRYLIC URETHANE COATING
12	SEAT RING	EPDM	1	
		NBR		
3	STEM	SUS420J2	1set	
2	DISC	SCS14	1	
1	BODY	FCD450	1	NYLON-LINING
No.	Name of Parts	Materials	Q'ty	Descriptions

TEST PRESSURE

BODY (Water) 1.5 MPa

SEAT (Water) 1.1 MPa

JIS B 2032 CONFORMITY PRODUCT
NYLON-LINING
GEAR TYPE BUTTERFLY VALVE

FIGURE

NGR

Approval Check Drawing Date Scale

S. Ume A. SETOGUCHI 2023.05.18

Yamato Valve Co., Ltd.

図番

Drawing No.
NGR-66833-E-E