
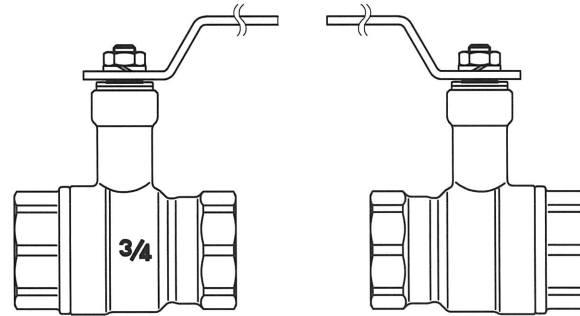
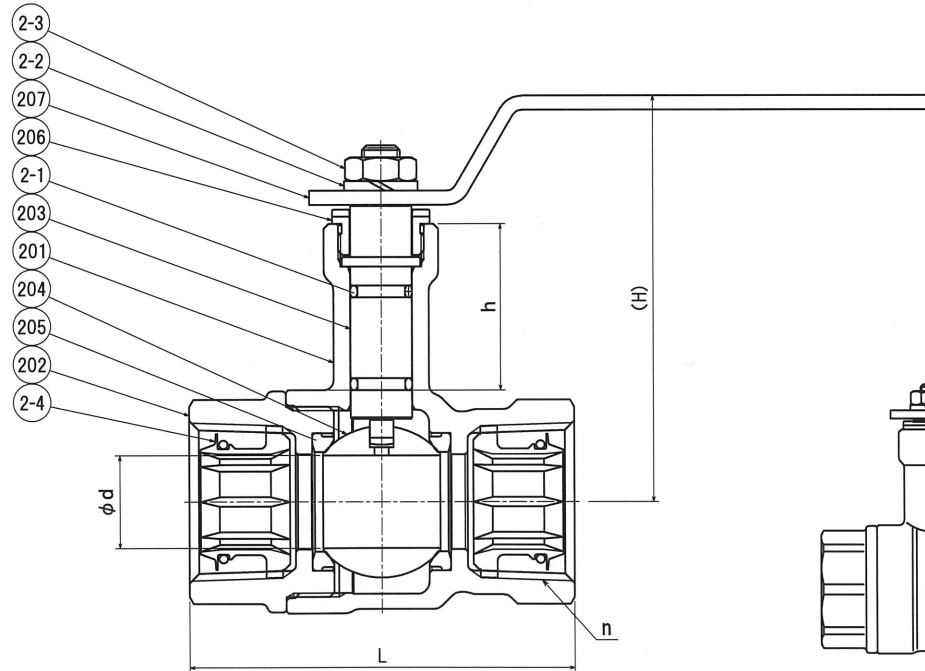


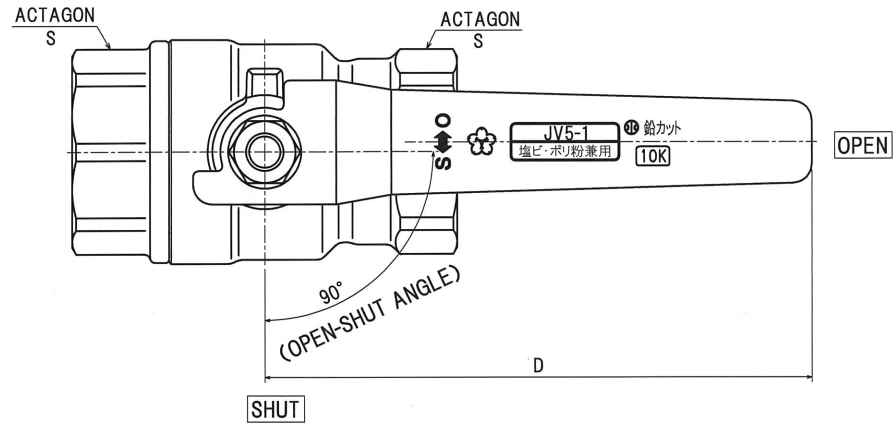

Marking(3/4B)

SIZE		d	n	L	H	D	h	S	WEIGHT
Inch	mm								(kg)
1/2B	15A	9.5	Rc 1/2	60	77	85	34.5	27.5	0.4
3/4B	20A	14.5	Rc 3/4	66.5	80	85	33	33.5	0.5
1B	25A	19.5	RC 1	81	85.5	115	35	41	0.7
1 1/4B	32A	24.5	Rc 1 1/4	90.5	98	115	43	51	1.1
1 1/2B	40A	31.5	Rc 1 1/2	98	103.5	115	43.5	58	1.6
2B	50A	39.5	Rc 2	117	111.5	130	45	71	2.4

<TEMPERATURE-PRESSURE SPECIFIC>

STATE OF FLUID	MAXIMUM PERMISSIBLE WORKING PRESSURE
PULSATING FLOW - 40°C OR BELOW	1.0 MPa
STEADY FLOW - 40°C OR BELOW	1.0 MPa

2-4	C-CORE	EPDM PE	2	O-Ring
2-3	NUT	SUS304	1	
2-2	SPRING WASHER	SUS304	1	
2-1	O-RING	FKM	2	
207	LEVER HANDLE	SUS430	1	Color:Light Blue
206	GLAND	C3604BD	1	
205	BALL SEAT	PTFE	2	
204	BALL	SUS304	1	
203	STEM	NBY	1	Dezincification Resistant Brass Rod
202	CAP	CAC406	1	
201	BODY	CAC406	1	
No.	Name of Parts	Materials	Q'ty	Descriptions

TEST PRESSURE

BODY (Water)	2.1 MPa
SEAT (Water)	1.54 MPa

JV-5
CORERING VALVE <FOR COLD WATER>
LEAD-CUT BRONZE 10K LONG NECK BALL VALVES

FIGURE

VLCSN

Approval	Check	Drawing	Date	Scale
S. Uno	S. Tehora	T.Nishikawa	2022.03.07	

Yamato Valve Co., Ltd.

図番

Drawing No.
BBBT-R013D