
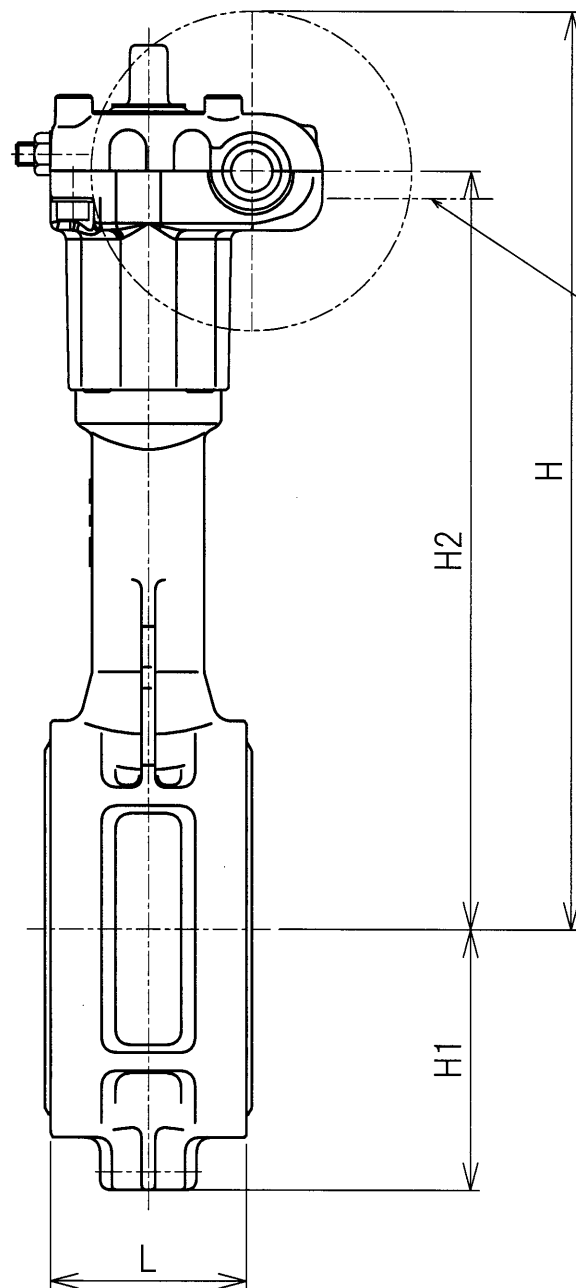
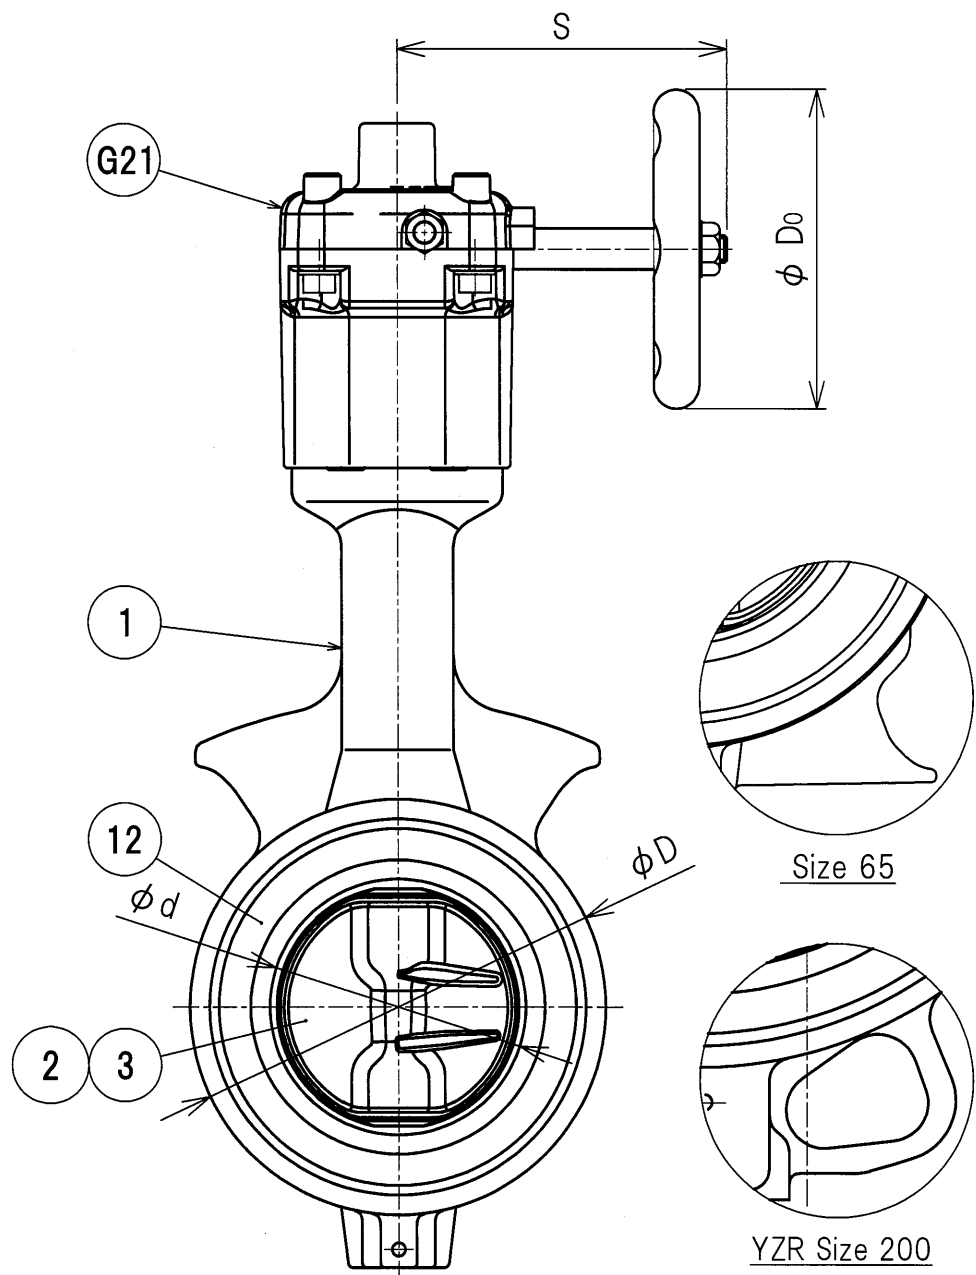


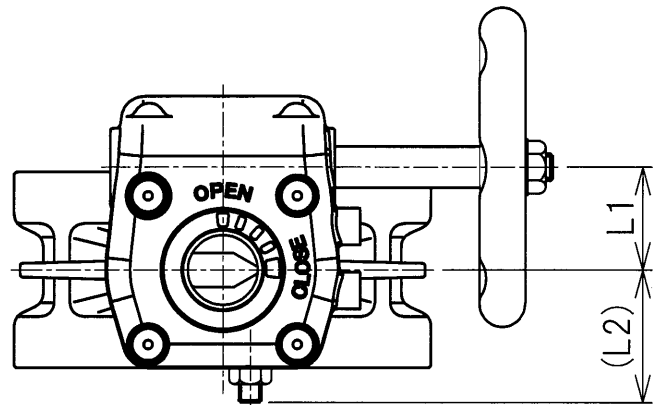

Surround a heat insulator to
two points of dot-dash line part.
(The position where a volt is covered)

	Size		d	L	D	H	H1	H2	L1	L2	S	D ₀	WEIGHT (kg)	
	A	B											YZR	YZR-B
※	40	1½	45	35	80	195	47	160	22.5	26	85	70	0.8	—
	50	2	56	43	91	201	57	166					1.0	1.1
	65	2½	69	46	111	214	64	179					1.2	1.3
	80	3	84	46	125	207	77	172	28	31	110		1.7	1.8
	100	4	104	52	147	218	94	183					2.2	2.3
	125	5	130	56	180	261	108	211	46	42	133		100	3.8
150	6	153.5	56	210	272	125	222	4.7				5.0		
※	200	8	199	60	255	319.5	167	257	53	40	162	125	7.2	—
※	250	10	253	68	322	416	186	316	71	54	206	200	13	—
※	300	12	302	78	375	448	216	348					18	—

※ Size 40 and 200-300 is only YZR.

Figure	Purpose	Maximum Permissible Working Pressure
YZR	Condensation Measures	1.0 MPa
YZR-B	Hot Water Supply	1.0 MPa

※ Please refer to a Catalogue
Consecutive use temperature ranges and use temperature ranges.

G21	WORM GEAR ACTUATOR	ADC12/RESIN	1set	YZR-B : Orange YZR : Green
12	SEATRING	FKM EPDM	1	YZR-B YZR
3	STEM	SUS420J2	1set	
2	DISC	SCS14 SCS13	1	YZR-B YZR
1	BODY	ADC12	1	
No.	Name of Parts	Materials	Q'ty	Descriptions
Test Pressure		JIS B 2032		
Flange Connection		JIS 5K / JIS 10K		
JIS B 2032 COFORMITY PRODUCT GEAR-TYPE ALUMINIUM BUTTERFLY VALVES				Figure YZR series
Approval	Check	Drawing	Date	Scale
T.Ogawa	S.Ume	T.Nishikawa	2026.07.06	
Yamato Valve Co.,Ltd.				図番 YZR-64693-G-E