




Unit : mm

SIZE		d	L	FLANGE					D ₀	H	WEIGHT (kg)
A	B			D	C	n	h	t			
50	2	50	203	155	120	4	19	16	180	285	14
65	2 1/2	65	216	175	140			18		305	18
80	3	80	241	185	150	23			224	336	25
100	4	100	292	210	175				20	280	383
125	5	125	356	250	210		22	300		436	59
150	6	150	406	280	240	12		355	506	80	
200	8	200	495	330	290		450	609	113		

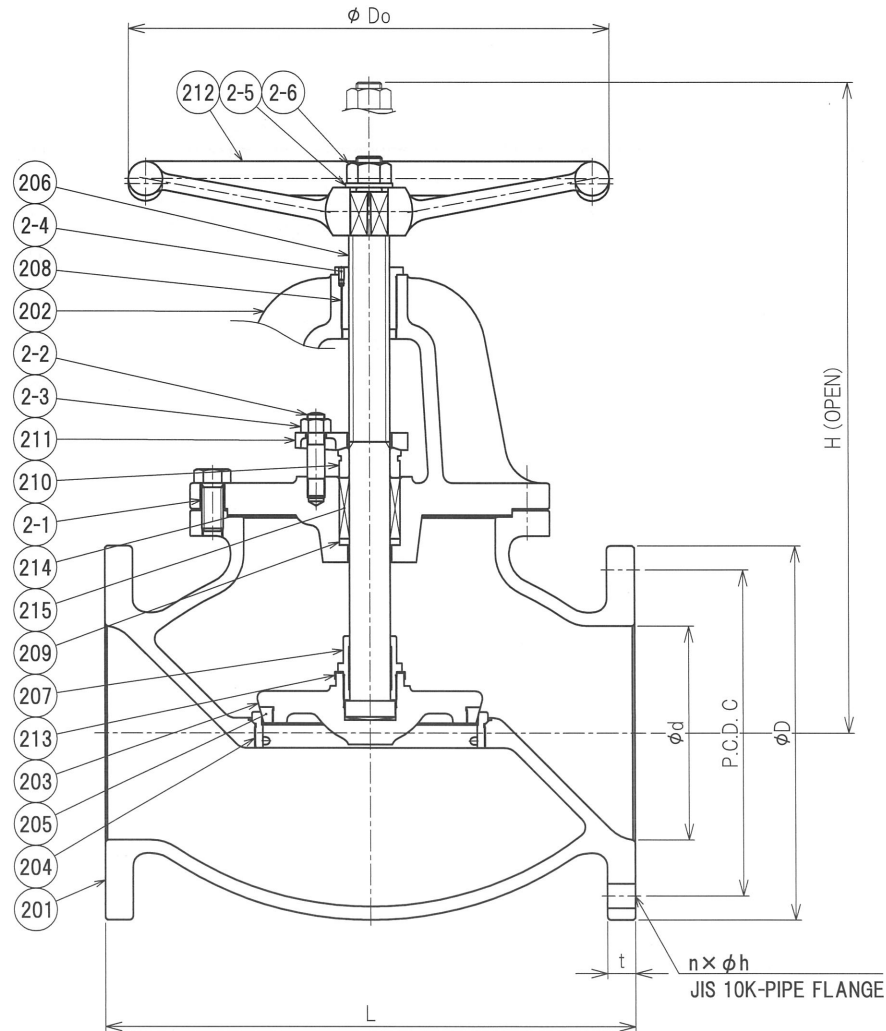

2-6	NUT	SS400	1	UNI-CR Plating
2-5	WASHER	SS400	1	UNI-CR Plating
2-4	SET SCREW	SCM435	1	
2-3	NUT	SS400	2	UNI-CR Plating
2-2	STUD BOLT	SS400	2	UNI-CR Plating
2-1	BOLT	S45C	1set	
215	PACKING	NON-ASBESTOS	1set	
214	GASKET	NON-ASBESTOS	1	
213	LOCK WASHER	SUS304CP	1	
212	HAND WHEEL	FC200	1	
211	PACKING GLAND	FCD450-10	1	UNI-CR Plating
210	PACKING BUSH	CAC406C	1	Size 100 Under
		CAC406	1	Size 125 Over
209	BONNET BUSH	CAC406C	1	
208	YOKE BUSH	CAC406	1	
207	STEM NUT	FCD500-7	1	
206	STEM	SUS403	1	
205	DISC SEATRING	SUS403	1	Size 80 Over
204	BODY SEATRING	SUS403	1	
203	DISC	SUS403	1	Size 65 Over
		FCD450-10	1	Size 80 Over
202	BONNET	FCD450-10	1	
201	BODY	FCD450-10	1	
No.	Name of Parts	Materials	Q'ty	Descriptions

TEST PRESSURE

BODY (Water)	2.10 MPa
SEAT (Water)	1.54 MPa

DUCTILE CAST IRON 10K
FLANGED GLOBE VALVESFIGURE
D10S

Approval	Check	Drawing	Date	Scale
<i>[Signature]</i>	S. Ume	T. KURISU	2025.08.05	

Yamato Valve Co., Ltd.

Drawing No.
DBBCA-R001P-E