


Unit: mm

SIZE		d	L	END FLANGE DIMENSIONS (JIS 10K)							D ₀	H
A	B			D	g	C	t	f	n	h		
65	2½	65	190	175	116	140	18	2	4	19	180	397
80	3	80	203	185	126	150	18	2	8	19	200	447
100	4	100	229	210	151	175	18	2	8	19	225	534
125	5	125	254	250	182	210	20	2	8	23	250	636
150	6	150	267	280	212	240	22	2	8	23	270	703

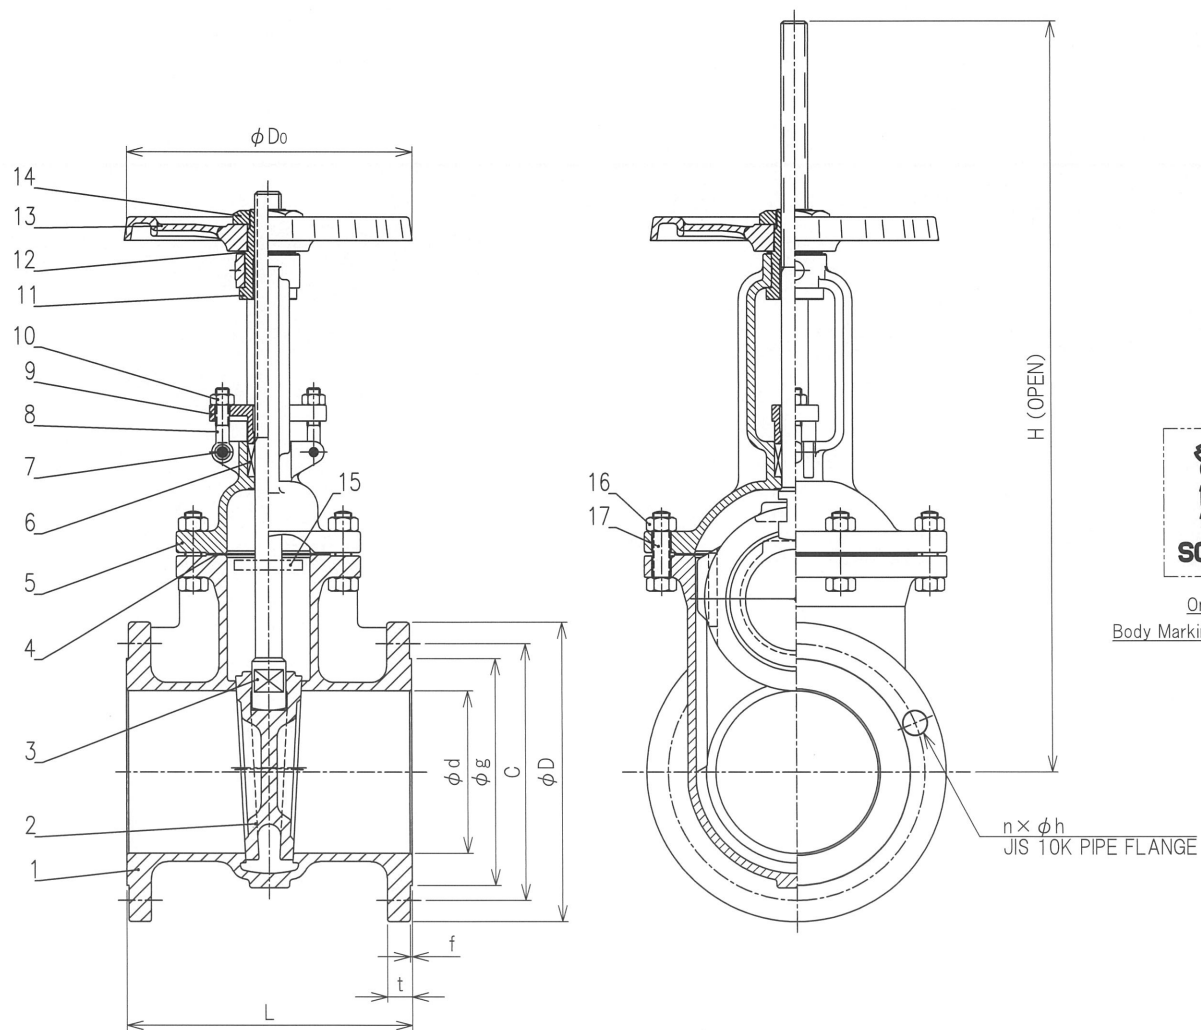

17	BOLT	SUS304	1set	
16	NUT	SUS304	1set	
15	NAME PLATE	STAINLESS	1	
14	WHEEL NUT	BRONZE	1	
13	HANDWHEEL	DUCTILE IRON	1	
12	WASHER	BRONZE	1	
11	YOKE SLEEVE	BRONZE	1	
10	GLAND NUT	SUS304	2	
9	PACKING GLAND	SCS13A	1	
8	GLAND BOLT	SUS304	2	
7	PIN	SUS304	2	
6	PACKING	NON-ASBESTOS	1	
5	BONNET	SCS13A	1	
4	GASKET	NON-ASBESTOS	1	
3	STEM	SUS304	1	
2	DISC	SCS13A	1	
1	BODY	SCS13A	1	
No.	Name of Parts	Materials	Q'ty	Descriptions

TEST PRESSURE

BODY (Water)	2.10 MPa
SEAT (Water)	1.54 MPa

STAINLESS STEEL 10K FLANGED
GATE VALVES OUTSIDE SCREWED

FIGURE
S10GA

Approval	Check	Drawing	Date	Scale
<i>[Signature]</i>	S. Vmo	A. Setoguchi	2025.08.25	

Yamato Valve Co., Ltd. 図番 Drawing No. S10GA-R001K-E