






Front



Back

Body Marking(Ex. Size 1)

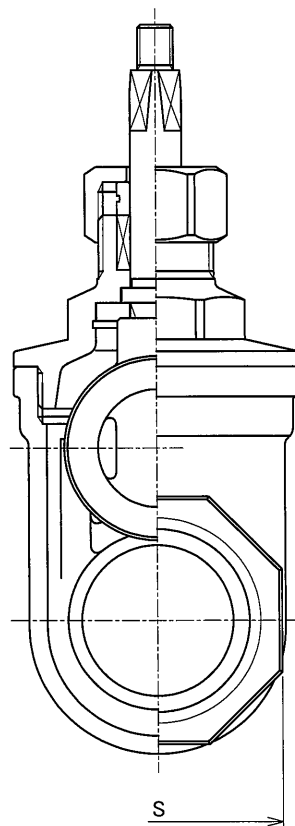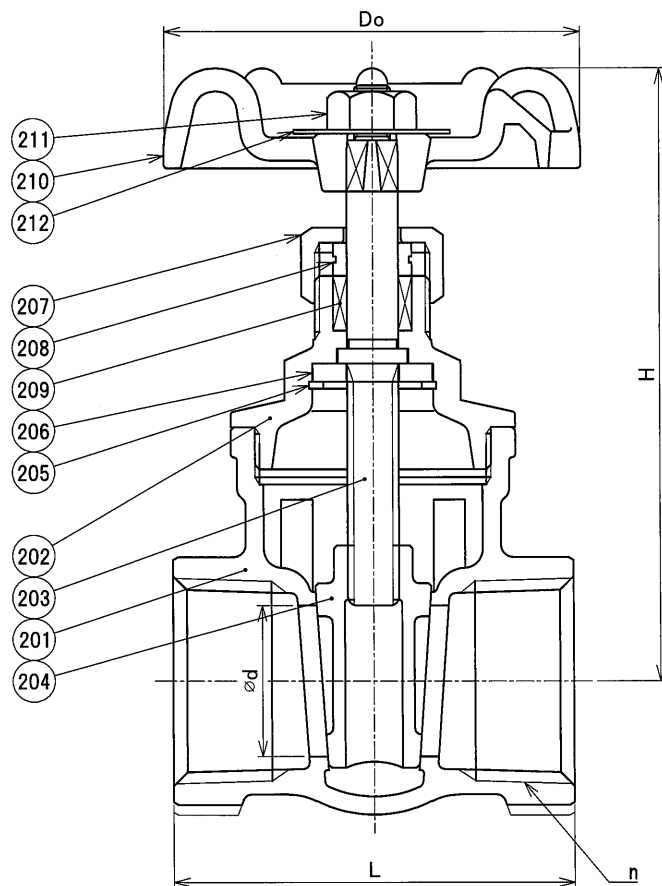

SIZE								Unit:mm WEIGHT
A	B	d	n	L	D ₀	H	S	(kg)
15	1/2	15	Rc 1/2	54	55	87	27	0.3
20	3/4	20	Rc 3/4	58	63	98	33	0.4
25	1	25	Rc 1	66	70	104	41	0.6
32	1 1/4	32	Rc 1 1/4	75	80	123	50	0.9
40	1 1/2	40	Rc 1 1/2	78	80	137	56	1.2
50	2	50	Rc 2	87	90	161	69	1.9

PRESSUER-TEMPERATURE SPECIFIC

State of Fluid	Maximum Permissible Working Pressure
120°C or Below	1.4 MPa
Steam-180°C or Below	1.0 MPa

212	NAME PLATE	A1100P-H	1	
211	WHEEL NUT	SUS304	1	
210	HAND WHEEL	ADC12	1	
209	PACKING	NON-ASBESTOS	1set	
208	GLAND	SUS304	1	
207	PACKING NUT	SCS13A	1	
206	WASHER	SUS304	1	
205	C TYPE RETAINING RING	SUS304	1	
204	DISC	SCS14A	1	
203	STEM	SUS316	1	HARD-Cr PLATING
202	BONNET	SCS13A	1	
201	BODY	SCS13A	1	

No.	Name of Parts	Materials	Q'ty	Descriptions
-----	---------------	-----------	------	--------------

TEST PRESSURE

BODY (Water)	2.10 MPa
SEAT (Water)	1.60 MPa

JV8-1 STAINLESS STEEL 10K INSIDE SCREWED GATE VALVES				FIGURE S10SG
--	--	--	--	-----------------

Approval	Check	Drawing	Date	Scale
<i>H/CB</i>	S.Vme	T.KURISU	2023.05.24	

Yamato Valve Co., Ltd.	図番	Drawing No. SBAGQ-R001D-E
-------------------------------	----	------------------------------