

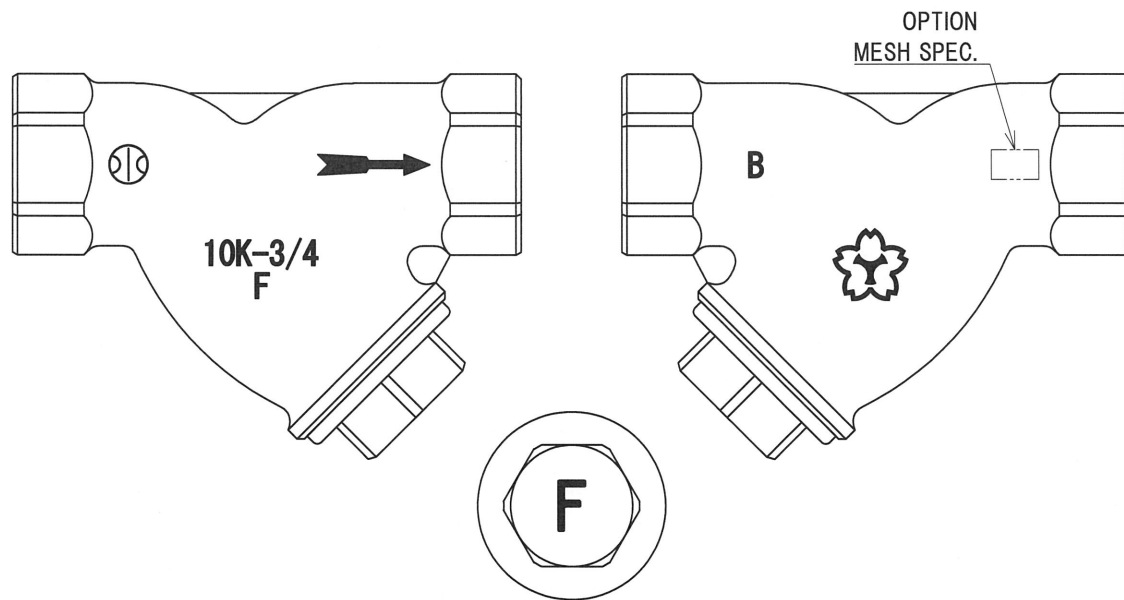


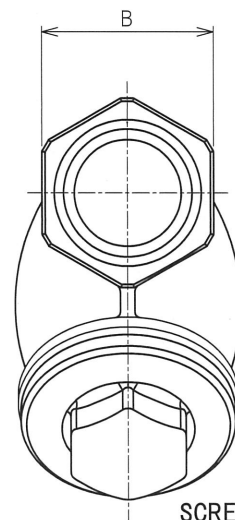

SIZE		n	L	H	B	X	Y	SCREEN	
inch	mm							φDs	Ls
1/2B	15A	Rc 1/2	80	49	27.5	70	91	18	40
3/4B	20A	Rc 3/4	100	58	33.5	85	109	23	50
1B	25A	Rc 1	115	71	41	108	138	29	64
1 1/4B	32A	Rc 1 1/4	135	82	51	127	162	36	75
1 1/2B	40A	Rc 1 1/2	160	98	58	152	194	44	90
2B	50A	Rc 2	195	120	71	191	244	54	115
2 1/2B	65A	Rc 2 1/2	225	136	87	216	272	69	125

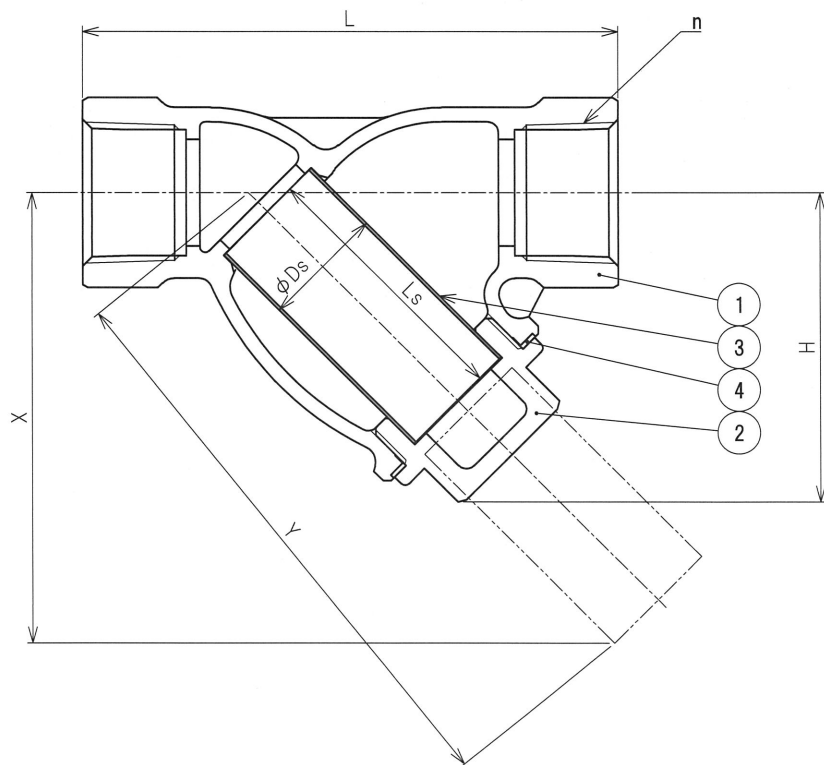

OPTION
SCREEN MESH SPEC.

HOLE DIAMETER	
Φ1.2	
20MESH	
60MESH	
80MESH	
100MESH	

4	GASKET	NON-ASBESTOS	1	
3	SCREEN	SUS304	1	40MESH
2	CAP	C3771B	1	
1	BODY	CAC902	1	
No.	Name of Parts	Materials	Q'ty	Descriptions
PRESSURE INSPECTION (JIS B 2031)				
DELIVERY INSPECTION (INSPECTION)			FORM INSPECTION (TEST)	
BODY	0.6 [MPa] (Air)	2.1 [MPa] (Water)		
LEAD-FREE BRONZE 10K SCREWED Y-TYPE STRAINER				FIGURE B10YTN
Approval	Check	Drawing	Date	Scale
<i>[Signature]</i>	<i>[Signature]</i>	S.Uno	2021.10.27	
Yamato Valve Co., Ltd.				Drawing No. BBSCH-R015B