



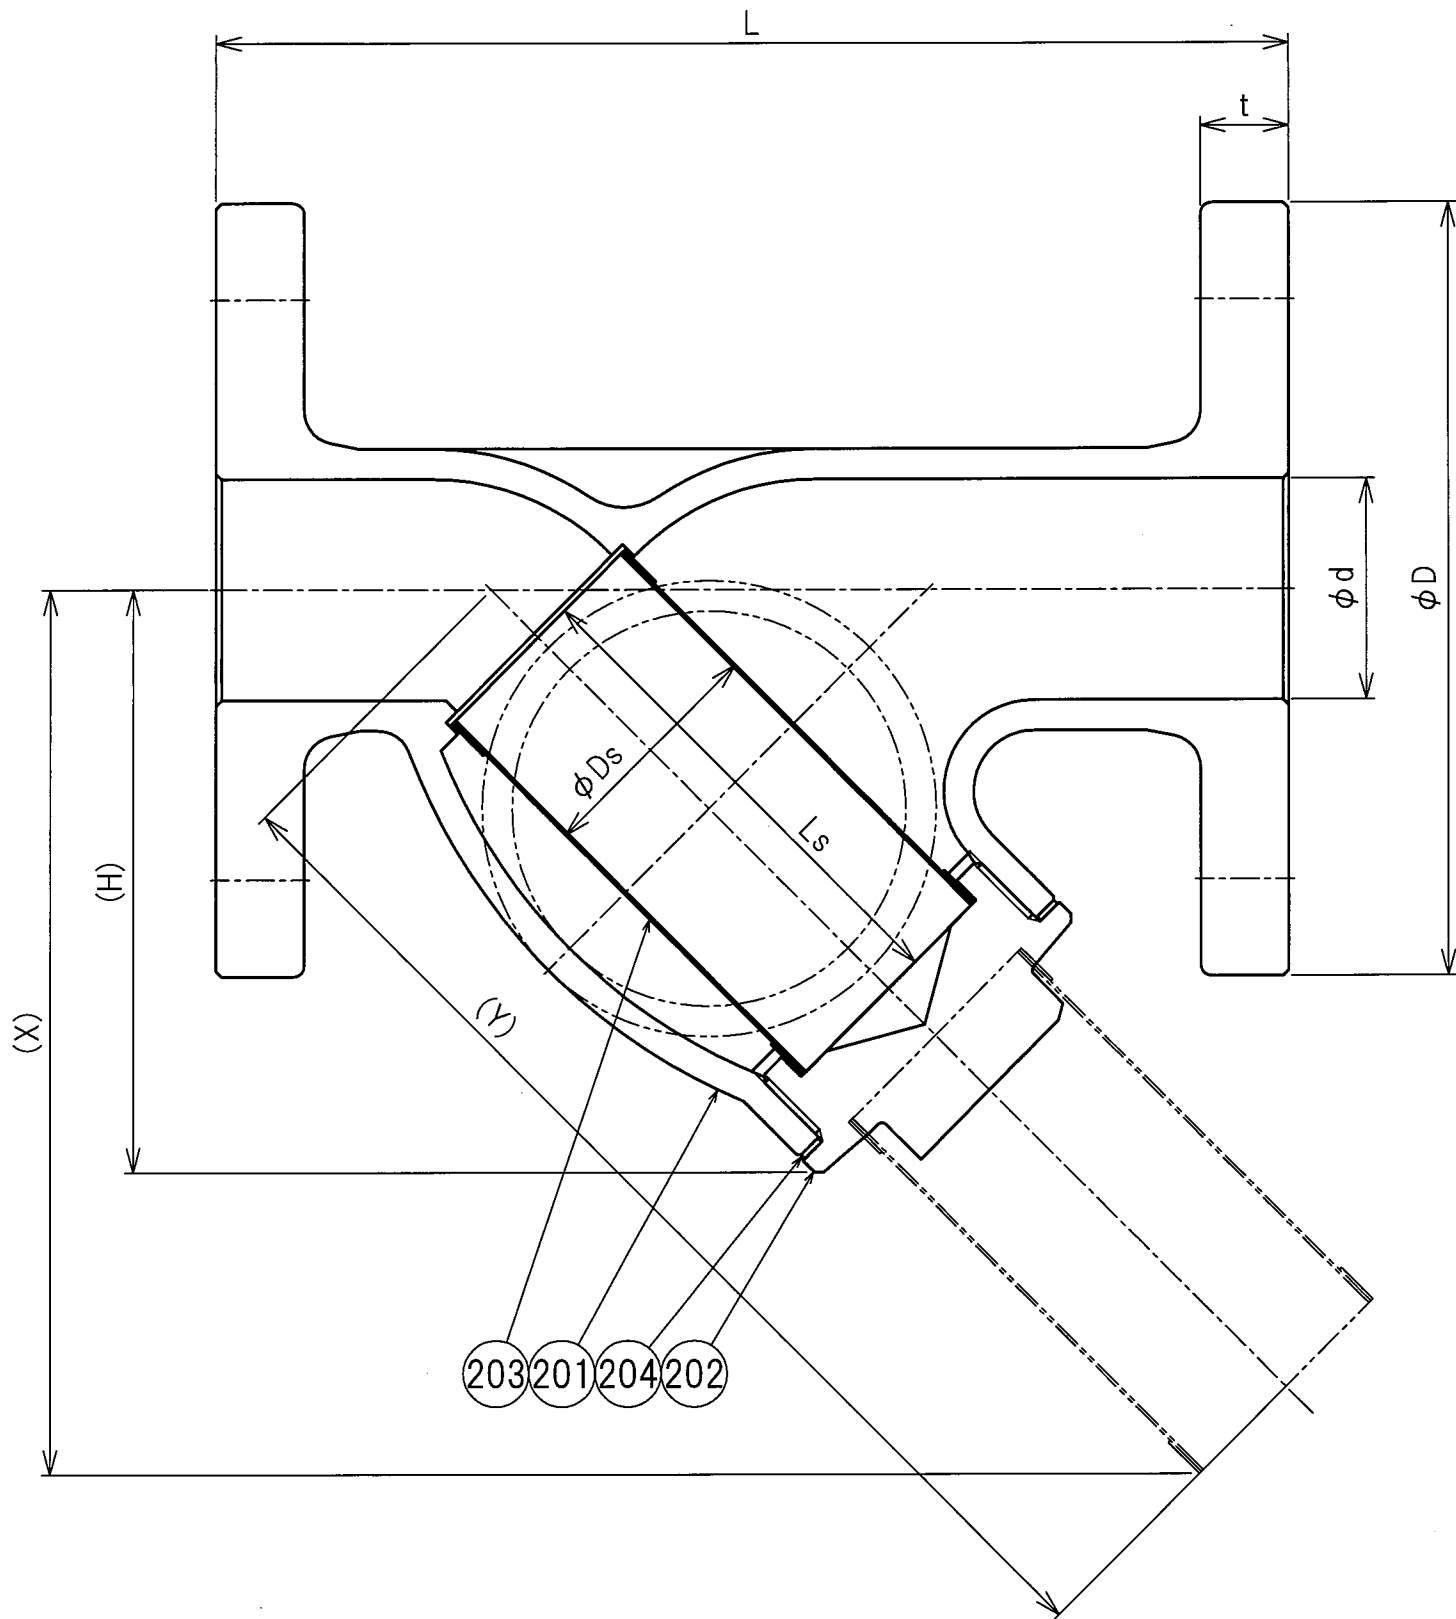

SIZE		d	L	FLANGE					H	X	Y	SCREEN	
inch	mm			D	C	n	h	t				Ds	Ls
3/4 B	20A	20	140	100	75	4	15	14	66	93	119	24.5	51
1B	25A	25	155	125	90	4	19	14	78.5	112	144	30.5	64
1 1/4 B	32A	32	180	135	100	4	19	16	93.5	137	174	39.5	77
1 1/2 B	40A	40	195	140	105	4	19	16	106	158	201	44.5	90

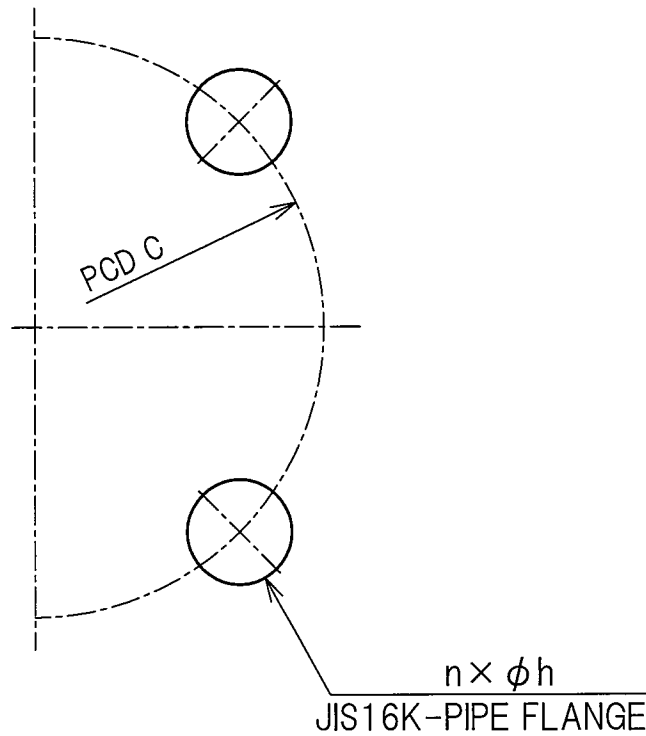

SCREEN MESH SPEC.

20MESH	
40MESH	
60MESH	
80MESH	

204	GASKET	NON-ASBESTOS	1	
203	SCREEN	SUS304CP	1	
202	COVER	FCD450-10	1	
201	BODY	FCD450-10	1	
No.	Name of Parts	Materials	Q'ty	Descriptions
	PRESSURE INSPECTION			
	DELIVERY INSPECTION (INSPECTION)		FORM INSPECTION (TEST)	
BODY	0.6 [MPa] (Air)		3.3 [MPa] (Water)	
SEAT	-		-	
DUCTILE CAST IRON 16K FLANGED Y-TYPE STRAINER				FIGURE
				D16Y
Approval	Check	Drawing	Date	Scale
S. Ume	Y. TAKEUCHI	T. KOZAI	2015. 3.12	
Yamato Valve Co., Ltd.			図番	Drawing No. DCSAB-R011G