


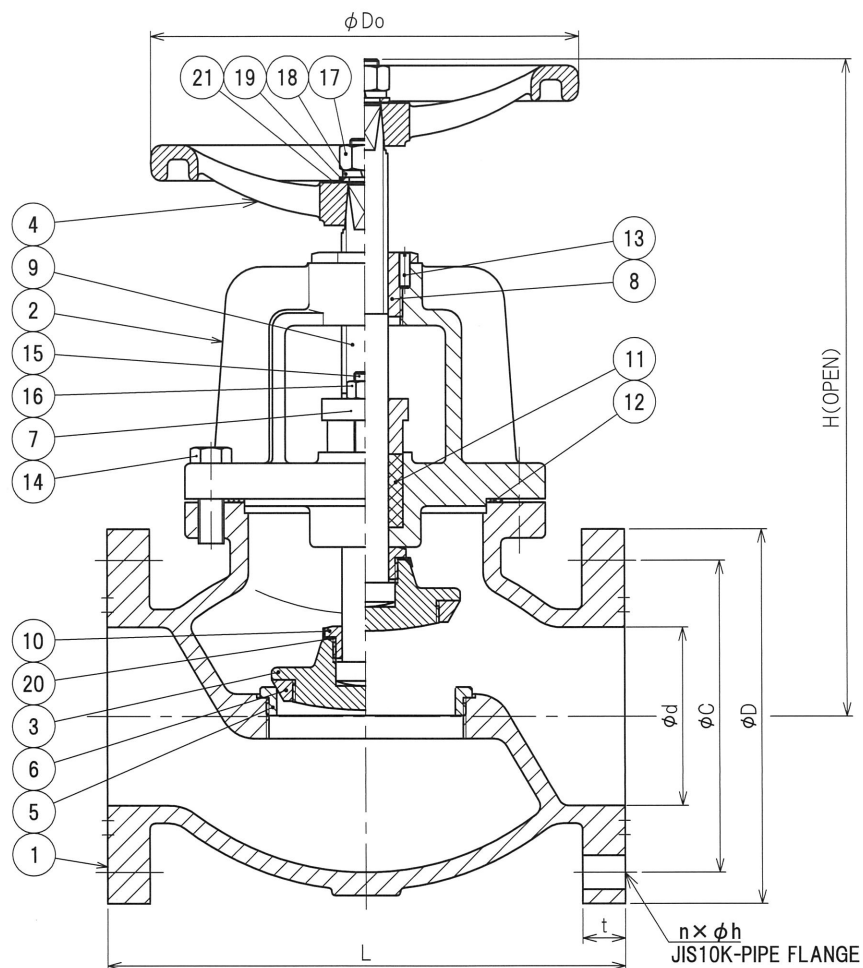

SIZE		d	L	FLANGE					Do	H
inch	mm			D	C	n	h	t		
1 1/2 B	40A	40	190	140	105	4	19	20	190	260
2 B	50A	50	200	155	120	4	19	20	190	269
2 1/2 B	65A	65	220	175	140	4	19	22	190	301.5
3 B	80A	80	240	185	150	8	19	22	210	313
4 B	100A	100	290	210	175	8	19	24	240	366.5
5 B	125A	125	360	250	210	8	23	24	260	447
6 B	150A	150	410	280	240	8	23	26	270	504
8 B	200A	200	500	330	290	12	23	26	350	614

21	NAME PLATE	A1050P	1	
20	DETENT	SUS304	1	
19	WASHER	SS400	1	
18	SPRING WASHER	SS400	1	
17	NUT	SS400	1	
16	NUT	SS400	2	
15	BOLT	SS400	2	
14	BOLT	SS400	1set	
13	SET SCREW	SS400	1	
12	GASKET	NON-ASBESTOS	1	
11	PACKING	NON-ASBESTOS	1set	
10	STEM NUT	CAC406	1	
9	STEM	SUS420J1	1	
8	YOKE BUSH	CAC406	1	
7	PACKING GLAND	SCS13	1	
6	DISC SEATRING	CAC406	1	
5	BODY SEATRING	CAC406	1	
4	HANDWHEEL	FC200	1	
3	DISC	FC200	1	
2	BONNET	FC200	1	
1	BODY	FC200	1	

No.	Name of Parts	Materials	Q'ty	Descriptions
	PRESSURE INSPECTION (JIS B 2031)			
	DELIVERY INSPECTION (INSPECTION)		FORM INSPECTION (TEST)	
BODY	40.50A 0.6 [MPa](Air)		2.1 [MPa] (Water)	
	65-200A 2.1 [MPa](Watre)			
SEAT	0.6 [MPa] (Air)		1.54 [MPa] (Water)	
JIS B 2031				FIGURE
CAST IRON 10K				F10SE
FLANGED GLOVE VALVES				
Approval	Check	Drawing	Date	Scale
S. Ume	S. Tetsuro	T. Nishikawa	2021.1.20	
Yamato Valve Co., Ltd.			図番	Drawing No. FBBAK-R003H