
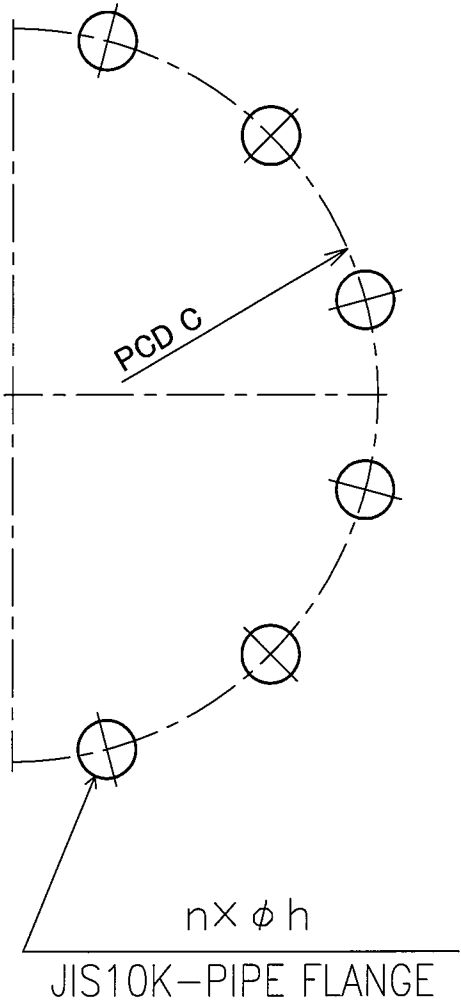


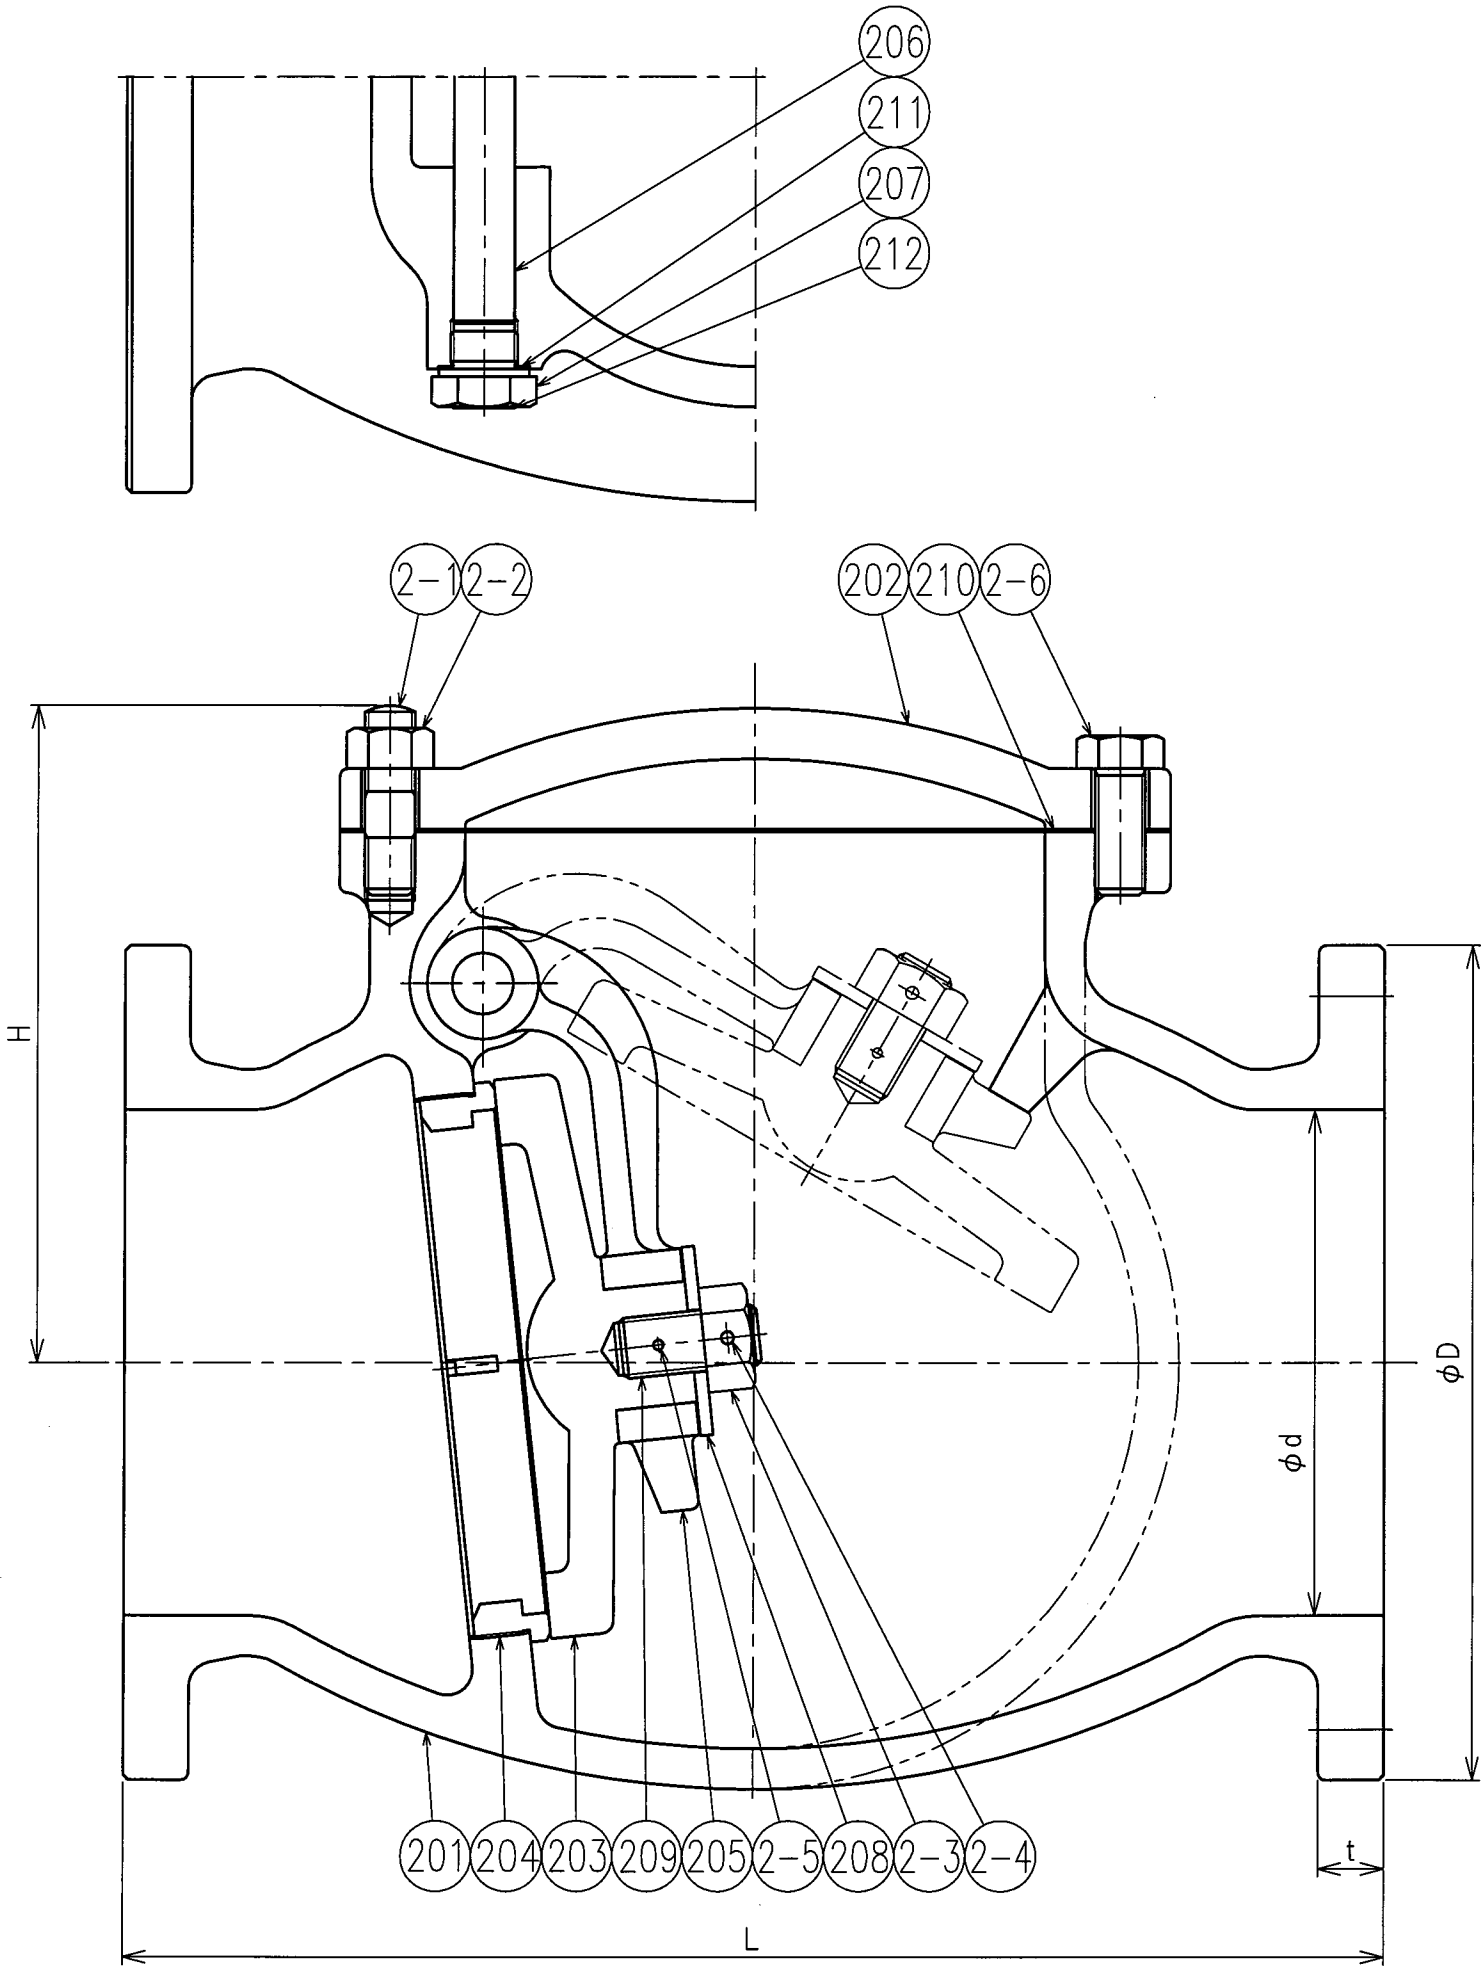

SIZE		d	L	FLANGE					H
inch	mm			D	C	n	h	t	
2B	50A	50	200	155	120	4	19	20	125
2½B	65A	65	220	175	140	4	19	22	135
3B	80A	80	240	185	150	8	19	22	150
4B	100A	100	290	210	175	8	19	24	170
5B	125A	125	360	250	210	8	23	24	195
6B	150A	150	410	280	240	8	23	26	225
8B	200A	200	500	330	290	12	23	26	260

2-6	BOLT	SS400	1set	
2-5	TAPER PIN	SUS304	1	200A
2-4	SPLIT PIN	SUS304	1	
2-3	NUT	SS400	1	UNI-CR PLATING
2-2	NUT	SS400	2	
2-1	COVER STUD	SS400	2	
212	LABEL	POLYESTER	1	
211	GASKET	NON-ASBESTOS	1	
210	GASKET	NON-ASBESTOS	1	
209	DISC STUD	C3771BD	1	200A
208	WASHER	C3604BD SS400	1	125A OVER 100A UNDER UNI-CR PLATING
207	PLUG	C3604BD	1	
206	HINGE PIN	C3604BD	1	
205	ARM	CAC406	1	
204	BODY SEATRING	CAC406	1	
203	DISC	CAC406	1	
202	COVER	FC200	1	
201	BODY	FC200	1	

No.	Name of Parts	Materials	Q'ty	Descriptions
PRESSURE INSPECTION (JIS B 2031)				
		DELIVERY INSPECTION (INSPECTION)	FORM INSPECTION (TEST)	
BODY	50A	0.6 [MPa] (Air)	2.1 [MPa] (Water)	
	65-300A	2.1 [MPa] (Water)		
SEAT		0.6 [MPa] (Air)	1.54 → 0.51 [MPa] (Water)	
JIS B 2031 CAST IRON 10K FLANGED SWING CHECK VALVES				FIGURE F10CE
Approval	Check	Drawing	Date	Scale
S. Vmo	K. MURAI	T. KOZAI	2015.11.10	
Yamato Valve Co., Ltd.			Drawing No. FBCAA-R072C	