


Unit:mm

SIZE		d	d _i	L	END FLANGE DIMENSIONS (JIS10K)					D ₀	H	WEIGHT (kg)
A	B				D	C	t	n	h			
15	½	14	18	85	95	70	12	4	15	60	105	1.7
20	¾	19	20	95	100	75	14	4	15	80	115	2.3
25	1	24	25	110	125	90	14	4	19	100	135	3.5
32	1 ¼	31	32	130	135	100	16	4	19	100	150	4.9
40	1 ½	39	40	150	140	105	16	4	19	100	170	6.1
50	2	49	50	180	155	120	16	4	19	100	190	7.7



Front

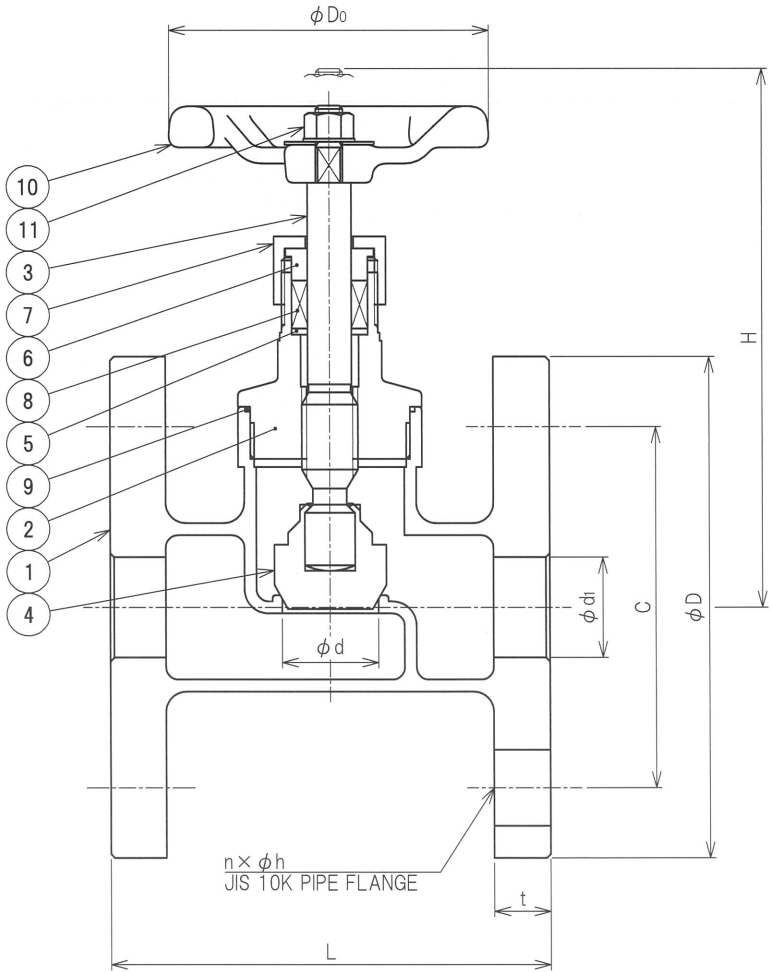

Back

Body Marking (Ex.Size 20)

11	HANDLE NUT	SUS304	1	
10	HAND WHEEL	ASTM A356	1	
9	GASKET	NON-ASBESTOS	1	
8	PACKING	NON-ASBESTOS	1set	
7	PACKING NUT	SCS13A	1	
6	GLAND	SUS304	1	
5	PACKING BUSH	SUS304	1	
4	DISC	SUS304	1	
3	STEM	SUS304	1	
2	BONNET	SCS13A	1	
1	BODY	SCS13A	1	
No.	Name of Parts	Materials	Q'ty	Descriptions
TEST PRESSURE				
BODY (Water)		2.10 MPa		
SEAT (Water)		1.54 MPa		
STAINLESS STEEL 10K FLANGED GLOVE VALVES, INSIDE SCREWED				FIGURE S10SH
Approval	Check	Drawing	Date	Scale
	S. Vmo	A. Setoguchi	2025.08.25	
Yamato Valve Co., Ltd.			Drawing No. S10SH-R001D-E	